

WAAS CH 50217 W27A	APP CRS 271°	Rwy Idg 6799 TDZE 1606 Apt Elev 1624
--	------------------------	---

RNAV (GPS) RWY 27


RHINELANDER-ONEIDA COUNTY (RHI)

RNP APCH - GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Tomahawk altimeter setting: increase LPV DA to 1865 feet and visibility ¼ SM; increase LNAV/VNAV DA to 2042 feet and visibility ¼ SM; increase all MDAs 60 feet and visibility Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Tomahawk altimeter setting.

MISSED APPROACH:
Climb to 4000 direct ECANA and hold.

ASOS 126.825	MINNEAPOLIS CENTER 133.65 281.5	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

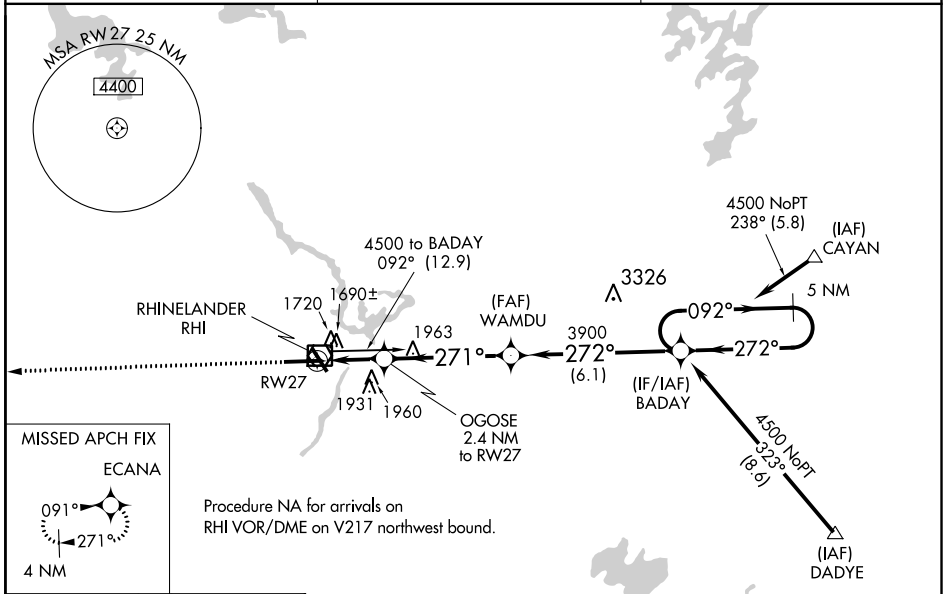

ELEV 1624	D	TDZE 1606
-----------	----------	-----------

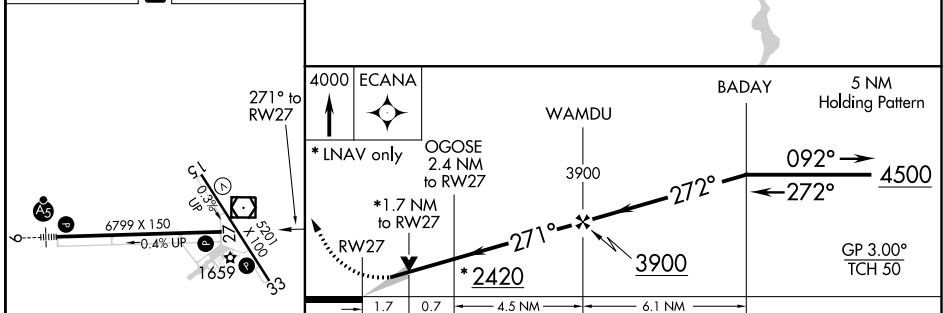

CATEGORY	A	B	C	D
LPV DA	1806-¾ 200 (200-¾)			
LNAV/VNAV DA	1983-1¼ 377 (400-1¼)			
LNAV MDA	2180-1	574 (600-1)	2180-1½ 574 (600-1½)	2180-1¾ 574 (600-1¾)
CIRCLING	2180-1 556 (600-1)	2260-1 636 (700-1)	2260-1¾ 636 (700-1¾)	2280-2 656 (700-2)

HIRL Rwy 9-27 and 15-33 **0**
REIL Rwy 15, 27 and 33 **0**

EC-3, 07 OCT 2021 to 04 NOV 2021

EC-3, 07 OCT 2021 to 04 NOV 2021