

NDB PCW 423	APP CRS 276°	Rwy Idg TDZE Apt Elev	5445 588 590
-----------------------	------------------------	-----------------------------	---


NDB RWY 27

ERIE-OTTAWA INTL (PCW)

NA When local altimeter setting not received, use Toledo Executive altimeter setting and increase all MDA 80 feet and all visibilities ¼ mile. Helicopter visibility reduction below ¾ SM NA.



MISSED APPROACH: Climbing right turn to 2500 in PCW NDB holding pattern.

AWOS-3 118.775	CLEVELAND APP CON 126.35 346.325	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

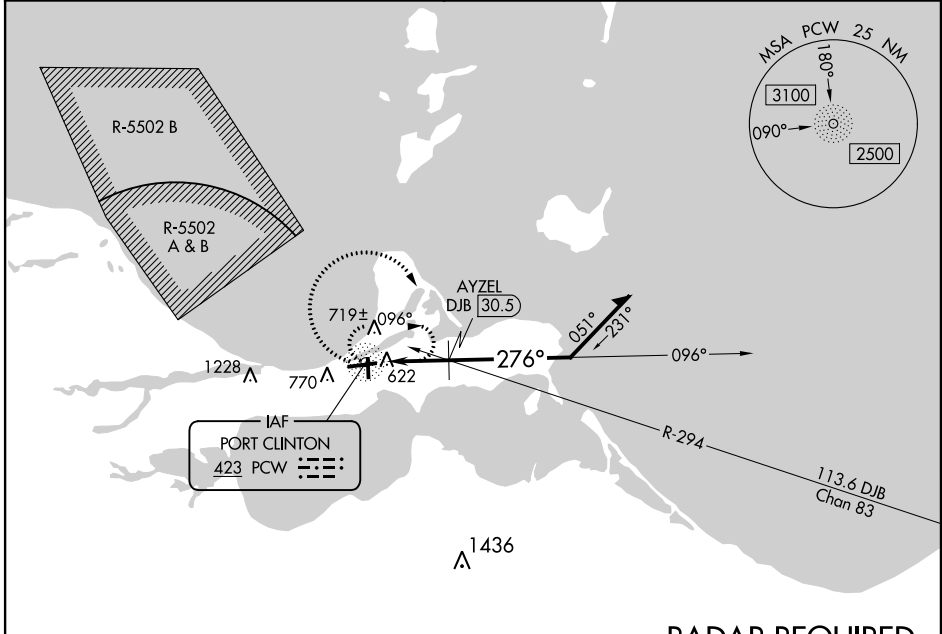

RADAR REQUIRED

ELEV 590	D	TDZE 588
----------	----------	----------

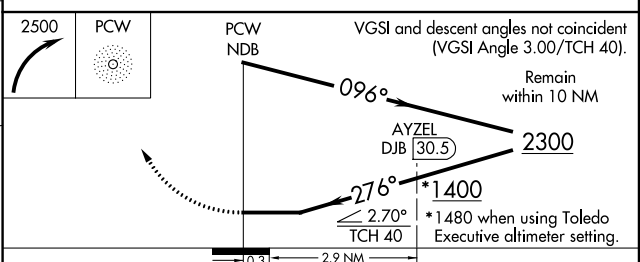

CATEGORY	A	B	C	D
S-27	1400-1 812 (900-1)	1400-1¼ 812 (900-1¼)	1400-2½	812 (900-2½)
C CIRCLING	1400-1 810 (900-1)	1400-1¼ 810 (900-1¼)	1400-2½ 810 (900-2½)	1580-3 990 (1000-3)
AYZEL FIX MINIMUMS (DME REQUIRED)				
S-27	1060-1	472 (500-1)	1060-1⅓	472 (500-1⅓)
C CIRCLING	1140-1	550 (600-1)	1180-1½ 590 (600-1½)	1580-3 990 (1000-3)

HIRL Rwy 9-27 **0**
MIRL Rwy 18-36 **0**
REIL Rwy 9 and 27 **0**

EC-2, 07 OCT 2021 to 04 NOV 2021

EC-2, 07 OCT 2021 to 04 NOV 2021