

FOLZZ ONE DEPARTURE (RNAV)


**TOP ALTITUDE:
ASSIGNED BY ATC**

D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(8L/8R, 12, 26L/26R) 121.8 348.6
(9, 27, 30) 127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
119.45 290.325

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: Jet aircraft only.
NOTE: DME/DME/IRU or GPS required.
NOTE: Accelerate to 250K, if unable, advise ATC.

TAKEOFF MINIMUMS:

- Rwy 8L: Standard with minimum climb of 500' per NM to 520, then minimum climb of 215' per NM to 1400.
- Rwy 8R: Standard with minimum climb of 500' per NM to 520, then minimum climb of 235' per NM to 1400.
- Rwy 9: Standard with minimum climb of 500' per NM to 520, then minimum climb of 240' per NM to 1400.
- Rwy 12: Standard with minimum climb of 500' per NM to 520, then minimum climb of 230' per NM to 1400.
- Rwy 26L/R, 27, 30: Standard with minimum climb of 500' per NM to 520.

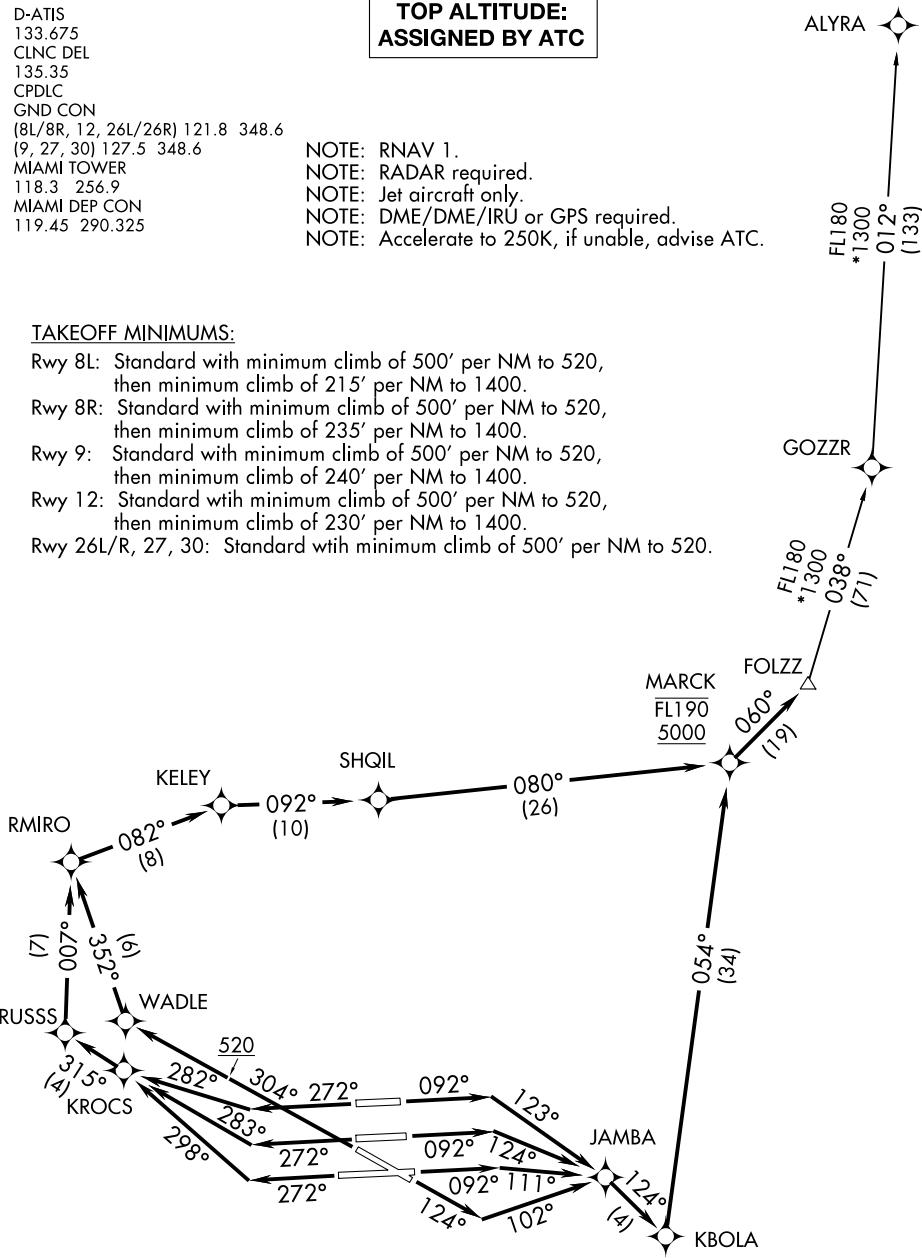

SE-3, 04 NOV 2021 to 02 DEC 2021

SE-3, 04 NOV 2021 to 02 DEC 2021

(NARRATIVE CONTINUED ON NEXT PAGE)

NOTE: Chart not to scale.