

# HURCN ONE DEPARTURE (RNAV)


SE-3, 04 NOV 2021 to 02 DEC 2021

### TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500' per NM to 520, then minimum climb of 215' per NM to 1400.  
 Rwy 8R: Standard with minimum climb of 500' per NM to 520, then minimum climb of 235' per NM to 1400.  
 Rwy 9: Standard with minimum climb of 500' per NM to 520, then minimum climb of 240' per NM to 1400.  
 Rwy 12: Standard with minimum climb of 500' per NM to 520, then minimum climb of 230' per NM to 1400.  
 Rwys 26L/R, 27, 30: Standard with minimum climb of 500' per NM to 520.

D-ATIS 133.675  
 CLNCDEL 135.55  
 CPDLC 135.35  
 GND CON (Rwys 8L/R, 12, 26L/R) 121.8, 348.6  
 (Rwys 9, 27, 30) 127.5, 348.6  
 MIAMI TOWER 118.3, 256.9  
 MIAMI DEP CON 119.45, 290.325

**TOP ALTITUDE:  
ASSIGNED BY ATC**

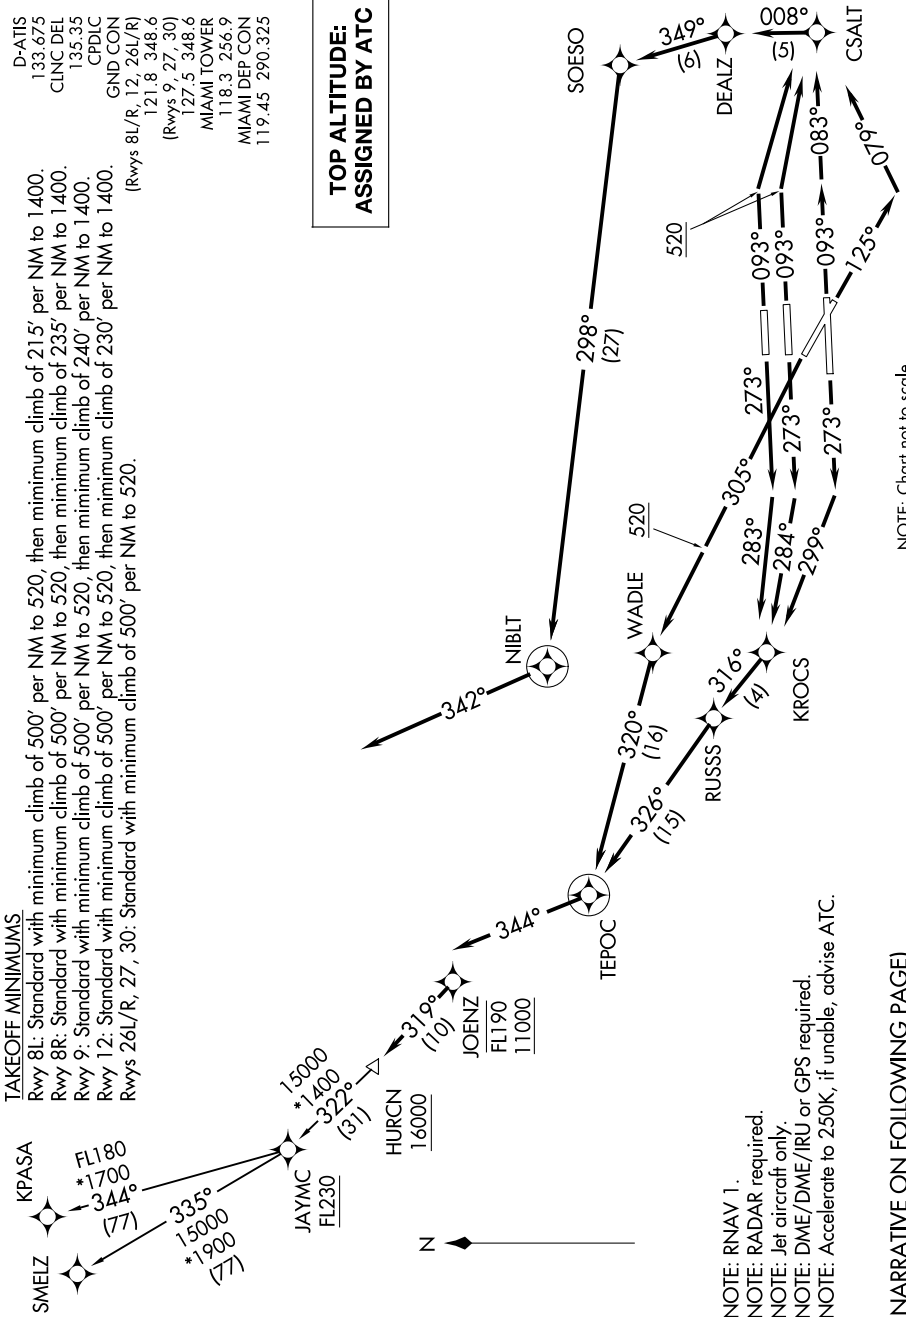

NOTE: RNAV 1.  
 NOTE: RADAR required.  
 NOTE: Jet aircraft only.  
 NOTE: DME/DME/IRU or GPS required.  
 NOTE: Accelerate to 250K, if unable, advise ATC.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)