


# MHITO ONE DEPARTURE (RNAV) Departure Routes

D-ATIS  
133.675  
CLNC DEL  
135.35  
CPDLC  
GND CON  
(Rwys 8L/R, 12, 26L/R)  
121.8 348.6  
(Rwys 9, 27, 30)  
127.5 348.6  
MIAMI TOWER  
118.3 256.9  
MIAMI DEP CON  
125.5 354.1

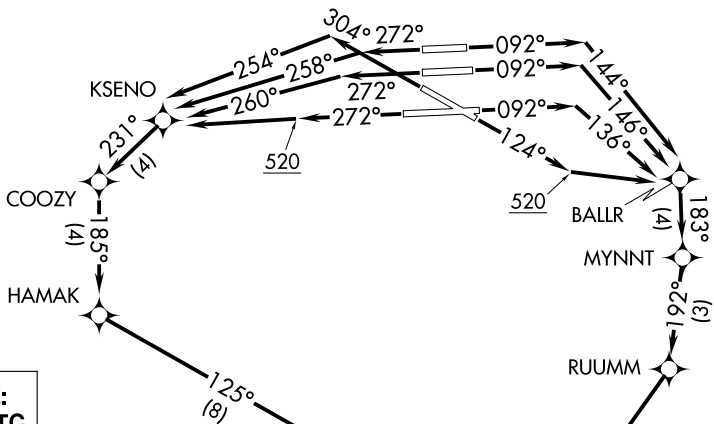

**TOP ALTITUDE:  
ASSIGNED BY ATC**

- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: Jet aircraft only.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: Accelerate to 250K, if unable, advise ATC.

### TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500 to 520, then minimum climb of 215' per NM to 1400.  
 Rwy 8R: Standard with minimum climb of 500 to 520, then minimum climb of 235' per NM to 1400.  
 Rwy 9: Standard with minimum climb of 500 to 520, then minimum climb of 240' per NM to 1400.  
 Rwy 12: Standard with minimum climb of 500 to 520, then minimum climb of 230' per NM to 1400.  
 Rwys 26L/R, 27, 30: Standard with minimum climb of 500 to 520.

MHITO  
See following page for Transition Routes.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

# MHITO ONE DEPARTURE (RNAV) Departure Routes