APP CRS	Rwy ldg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) X RWY 21L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.

Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	125.15 284.0	118.4 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

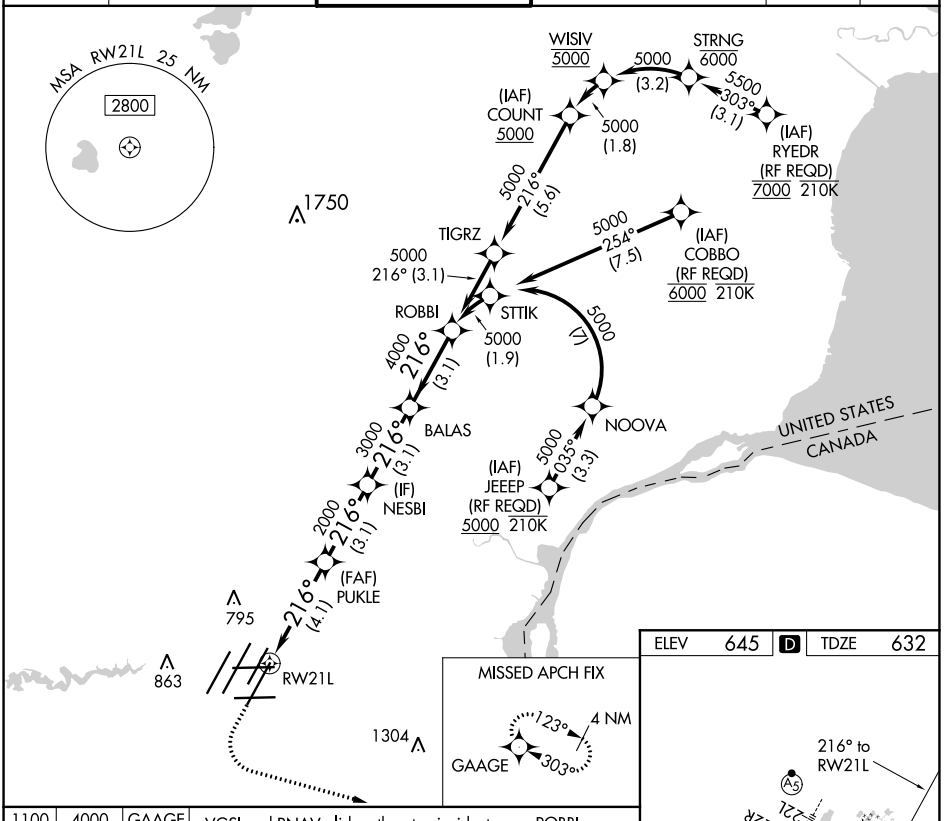

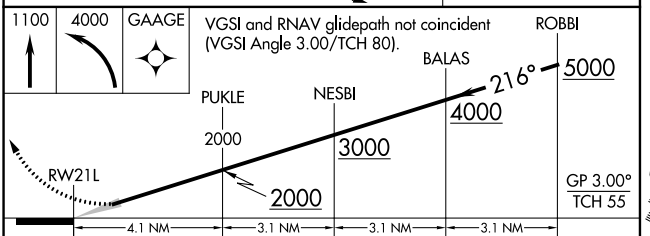

CATEGORY	A	B	C	D
RNP 0.30 DA	1062/40 430 (500-¾)			

AUTHORIZATION REQUIRED

ELEV 645 D TDZE 632



HIRL all runways
REIL Rwys 3L, 9L, 9R, and 21R
TDZ/CL Rwys 3R, 4L, 4R, and 22R

EC-1, 02 DEC 2021 to 30 DEC 2021
EC-1, 02 DEC 2021 to 30 DEC 2021