WAAS CH 70642 W22D	APP CRS 216°	Rwy Idg 10000 TDZE 642 Apt Elev 645

RNAV (GPS) Z RWY 22R

DETROIT METRO WAYNE COUNTY (DTW)

RNP APCH.

T Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

MALSR (A5)

MISSED APPROACH: Climb to 1100 then climbing right turn 4000 direct DOHNT and hold, continue climb in hold to 4000.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

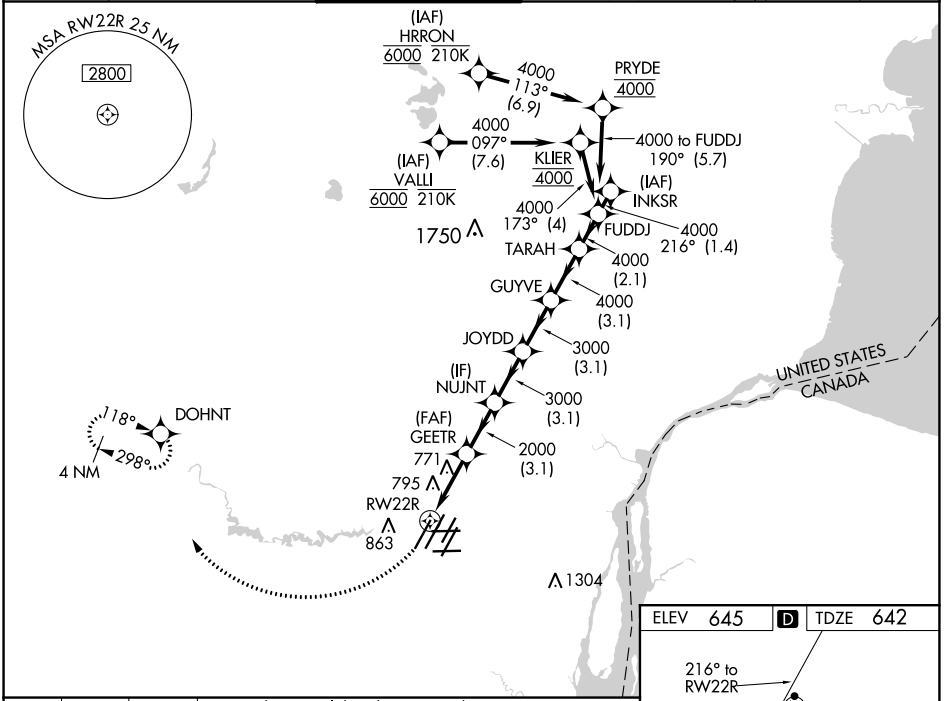

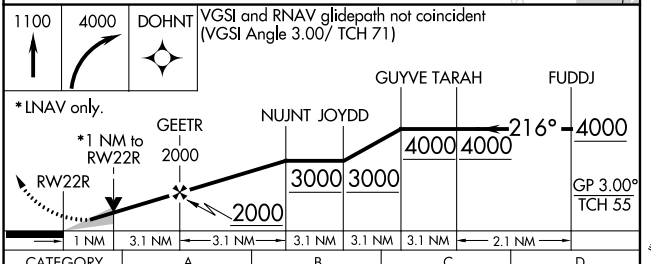

CATEGORY	A	B	C	D
LPV DA	842/18 200 (200-½)			
LNAV/VNAV DA	948/24 306 (400-½)			
LNAV MDA	1040/24 398 (400-½)		1040/35 398 (400-⅝)	
C CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½)	1240-2 595 (600-2)

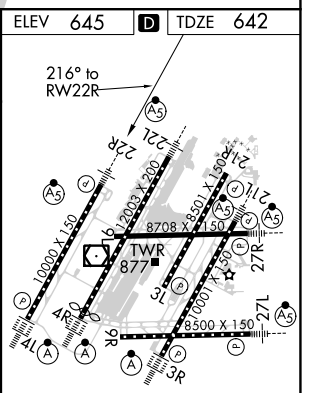

TDZ/CL Rwys 3R, 4L, 4R and 22R
REIL Rwys 3L, 9L, 9R and 21R
HIRL all runways

EC-1, 02 DEC 2021 to 30 DEC 2021
EC-1, 02 DEC 2021 to 30 DEC 2021