| APP CRS | Rwy Idg | 7702 |
|---|---|---|
| 021° | TDZE | 599 |
| | Apt Elev | 599 |

# RNAV (RNP) Z RWY 2L

NASHVILLE INTL (BNA)

For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15 all Cats visibility to RVR 4700, increase RNP 0.30 all Cats visibility to 1¼ mile. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 021° to HIKRY and hold, continue climb-in-hold to 4000.

| D-ATIS | NASHVILLE APP CON | NASHVILLE TOWER | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|
| 135.1 | 118.4 360.7 | 118.6 257.8 | 121.9 348.6 | 126.05 | |

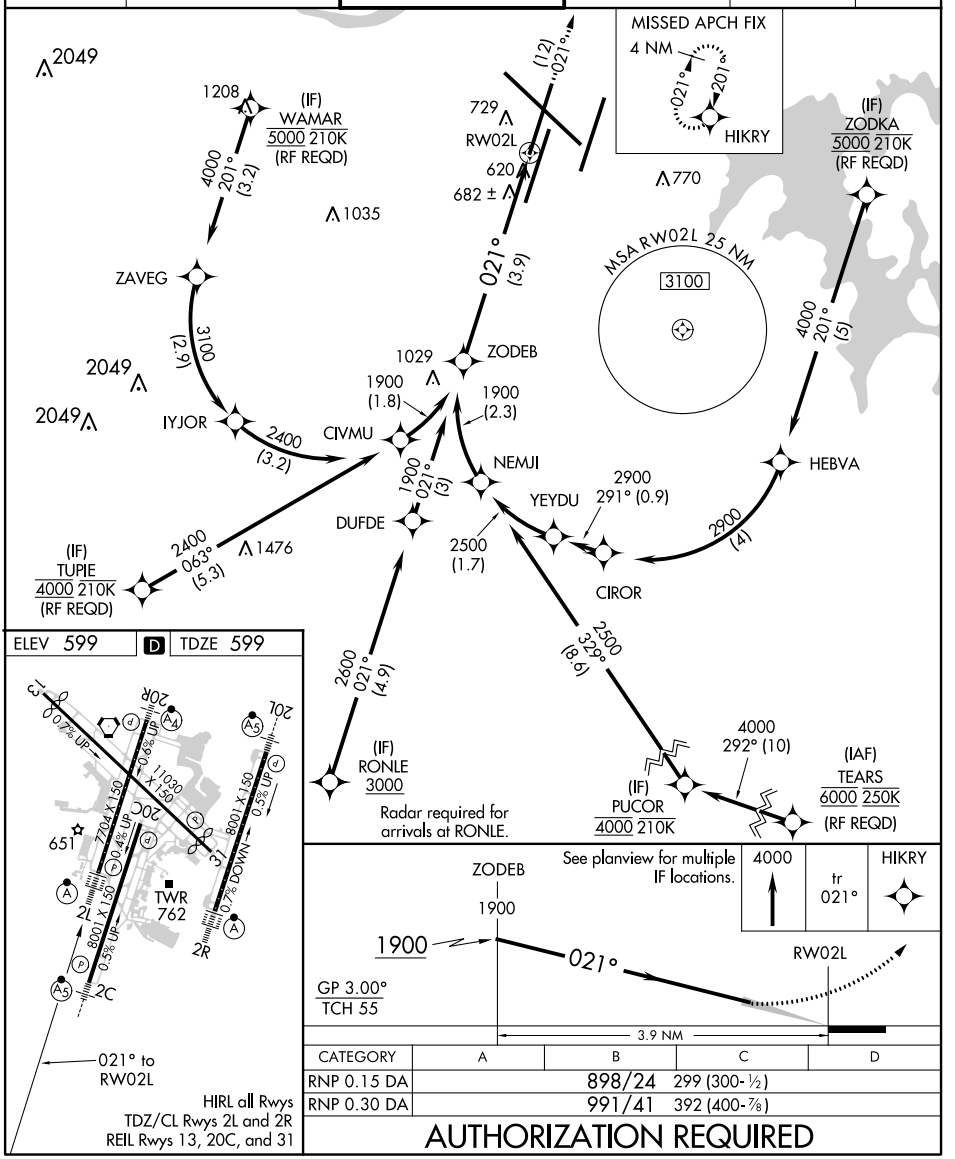


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.15 DA | 898/24 | | 299 (300-½) | |
| RNP 0.30 DA | 991/41 | | 392 (400-⅞) | |

## AUTHORIZATION REQUIRED



SE-1, 02 DEC 2021 to 30 DEC 2021
SE-1, 02 DEC 2021 to 30 DEC 2021