


KALLI SEVEN DEPARTURE (RNAV)

TOP ALTITUDE:
5000

TAKEOFF MINIMUMS

Rwys 2, 16, 20, 34: Standard with minimum climb of 500' per NM to 687.

ATIS 119.15 263.025
CLNC DEL 127.55 348.6
GND CON 121.9 348.6
RICHMOND TOWER 121.1 257.8
POTOMAC DEP CON 126.75 307.2

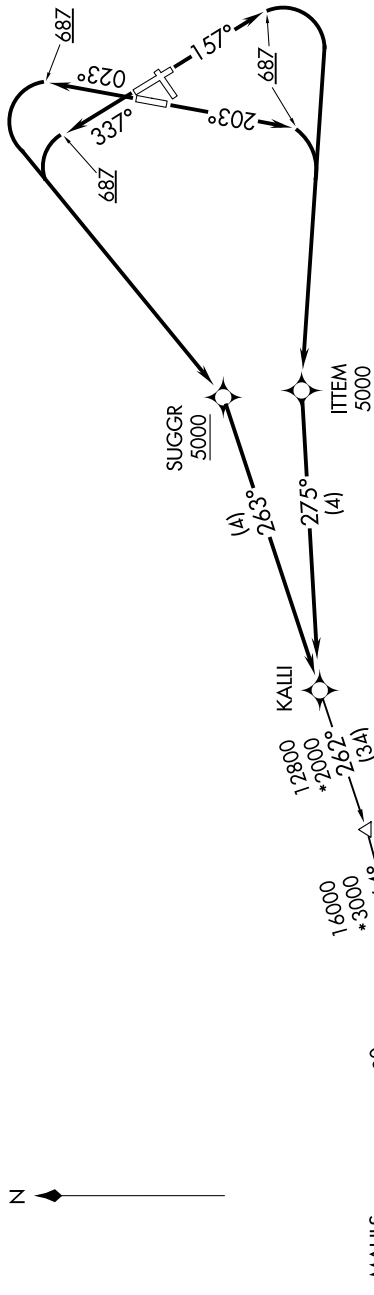

MAULS

FUBILL

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)