WAAS	APP CRS	Rwy Idg	8004
CH 77927	121°	TDZE	230
W12A		Apt Elev	261

RNAV (GPS) RWY 12

SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

T A Circling Rwy 2 NA at night. Baro-VNAV NA when using Vandenberg altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Vandenberg altimeter setting. When local altimeter setting not received use Vandenberg altimeter setting and increase all DA 43 feet and all MDAs 60 feet. Increase LNAV/VNAV all Cats visibility to RVR 4000, and increase Circling Cat C visibility to 1¾ mile. For inop MALSR, increase LNAV Cat C/D visibility to 1⅜ mile. #RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Vandenberg altimeter setting.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 5000 direct MQO VORTAC and hold.

ATIS	SANTA BARBARA APP CON★	SANTA MARIA TOWER★	GND CON	UNICOM
121.15	124.15 327.8	118.3 (CTAF) 239.25	121.9	122.95

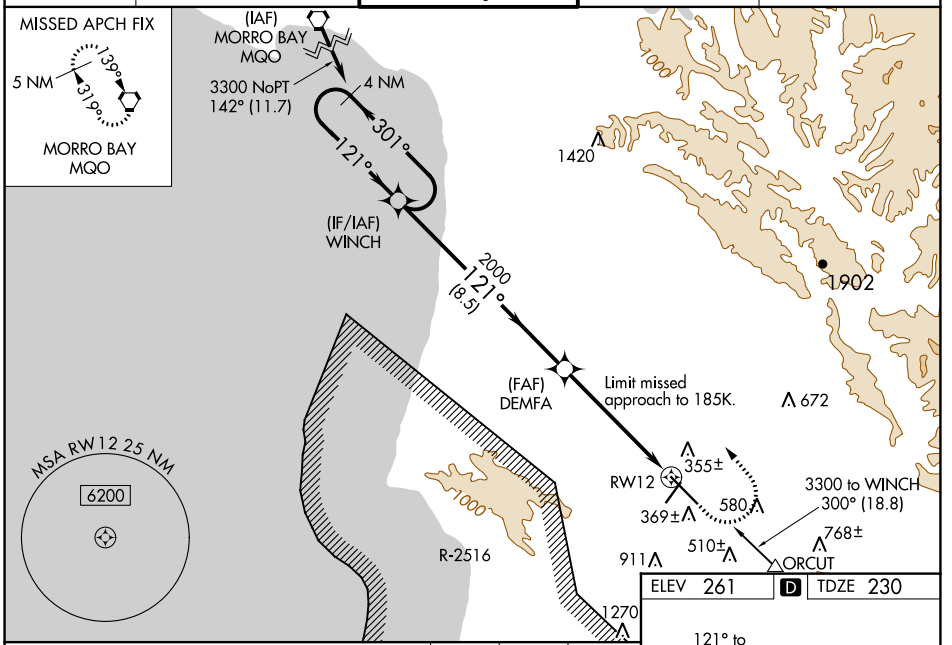

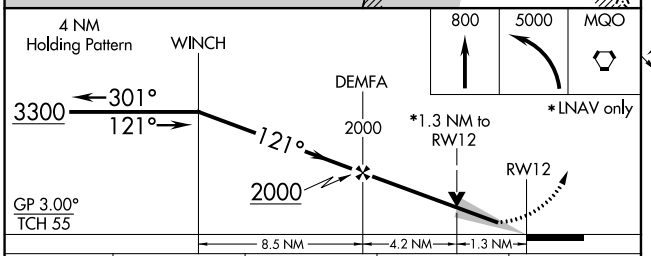



CATEGORY	A	B	C	D
LPV DA#	430/24 200 (200-½)			
LNAV/VNAV DA	563/32 333 (400-⅝)			
LNAV MDA	680/24 450 (500-½)		680/50 450 (500-1)	
CIRCLING	860-1 599 (600-1)		860-1½ 599 (600-1½)	1320-3 1059 (1100-3)

HIRL Rwy 12-30 L

SW-3, 02 DEC 2021 to 30 DEC 2021