


# SHPRD FOUR DEPARTURE (RNAV)

**TOP ALTITUDE:  
6000**

D-ATIS  
123.8  
CLNC DEL  
120.1  
CPDLC  
GND CON  
121.9 348.6 (EAST)  
(Rwys 5R-23L, 14-32)  
121.7 348.6 (WEST)  
(Rwy 5L-23R)  
RALEIGH TOWER  
127.45 257.8 (EAST)  
(Rwys 5R-23L, 14-32)  
119.3 257.8 (WEST)  
(Rwy 5L-23R)  
RALEIGH DEP CON  
132.35 256.9

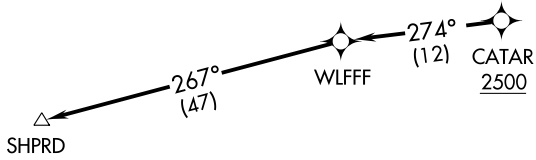

- NOTE: If unable to accept climb rate, advise ATC on initial contact.
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RADAR required.
- NOTE: For turbojet aircraft only.

### TAKEOFF MINIMUMS

Rwys 14, 32: NA - ATC.  
 Rwys 5L/R: Standard.  
 Rwy 23L: Standard with minimum climb of 250' per NM to 2300.  
 Rwy 23R: Standard with minimum climb of 240' per NM to 2100.

NOTE: Chart not to scale.



### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 5L/R, 23L/R: Climb on assigned heading for RADAR vectors to cross CATAR at or above 2500, thence. . . .

. . . .on depicted route to SHPRD, then as assigned. Maintain 6000, expect clearance to filed altitude within ten minutes after departure.

SE-2, 02 DEC 2021 to 30 DEC 2021

SE-2, 02 DEC 2021 to 30 DEC 2021