WAAS CH 86706 W23A	APP CRS 231°	Rwy Idg 5002 TDZE 191 Apt Elev 193

RNAV (GPS) RWY 23

DINWIDDIE COUNTY (PTB)

Baro-VNAV NA when using Richmond Exec/Chesterfield County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Richmond Exec/Chesterfield County altimeter setting: increase LPV DA to 478 feet and LNAV/VNAV DA to 517 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C visibility ⅛ mile, and increase Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct FASOS and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
133.325	126.75 307.2	135.075	122.7 (CTAF) L

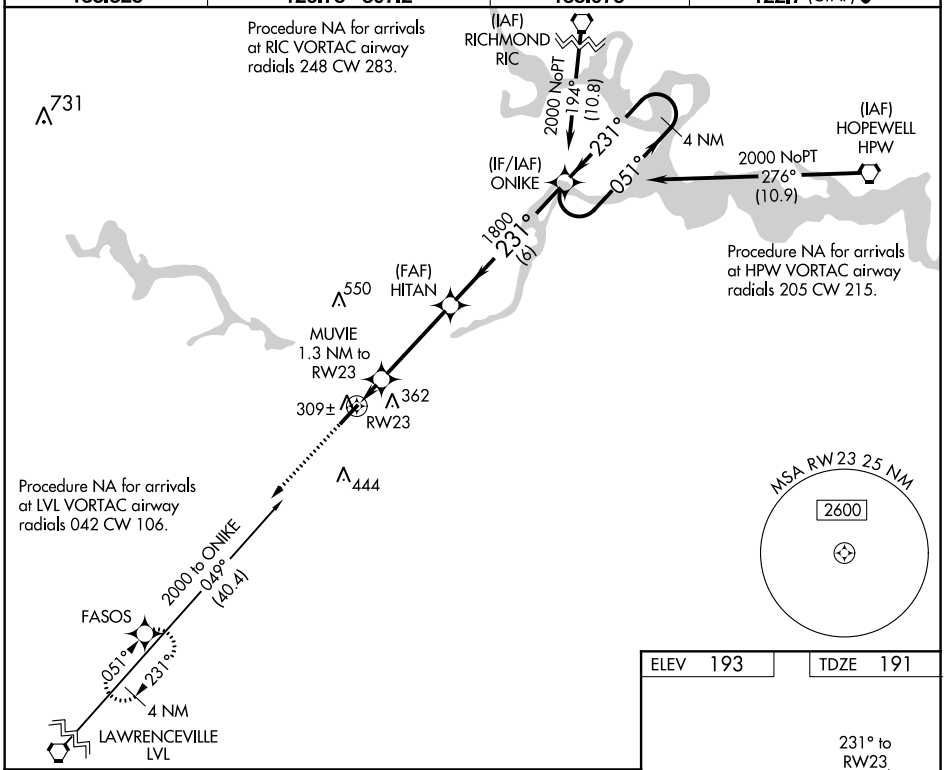

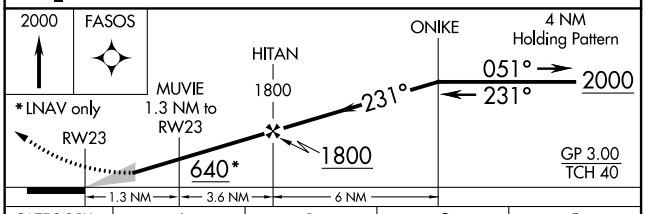

CATEGORY	A	B	C	D
LPV DA	441-1	250 (300-1)		NA
LNAV/VNAV DA	480-1	289 (300-1)		NA
LNAV MDA	560-1	369 (400- 1)		NA
C CIRCLING	680-1	487 (500- 1)	760-1½ 567 (600-1½)	NA

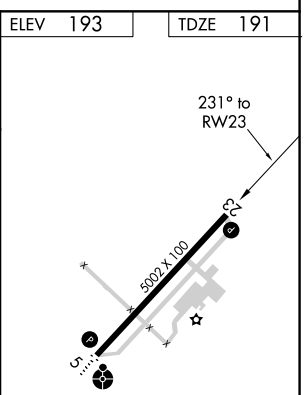

MIRL Rwy 5-23 L
REIL Rwy 23 L

NE-3, 02 DEC 2021 to 30 DEC 2021
NE-3, 02 DEC 2021 to 30 DEC 2021