

LOC I-UGZ 111.9	APP CRS 227°	Rwy Idg TDZE Apt Elev	5500 133 133
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 23

WAYNE EXEC JETPORT (GWW)

⚠ When local altimeter setting not received, use Smithfield altimeter setting and increase DA to 387 feet and all MDA 60 feet, increase S-LOC 23 Cats C/D visibility 1/8 SM, Circling Cats C/D 1/4 SM. Inop table does not apply to S-ILS 23.

ODALS  MISSED APPROACH: Climb to 900 then climbing right turn to 2000 on heading 040° and ISO VORTAC R-302 to WADUG INT/ISO 23.3 DME and hold.

AWOS-3P 118.975	SEYMOUR JOHNSON APP CON ★ 121.175 290.9	UNICOM 122.975 (CTAF) 0
---------------------------	---	-----------------------------------

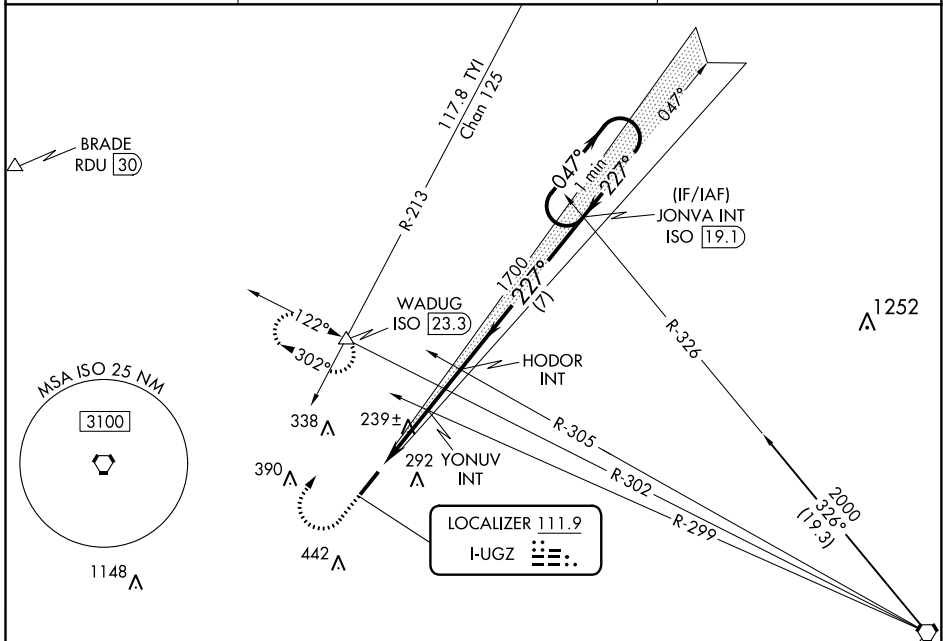



SE-2, 02 DEC 2021 to 30 DEC 2021

SE-2, 02 DEC 2021 to 30 DEC 2021

ELEV 133	TDZE 133
----------	----------

DME or RADAR REQUIRED

KINSTON
109.6 ISO 
Chan 33

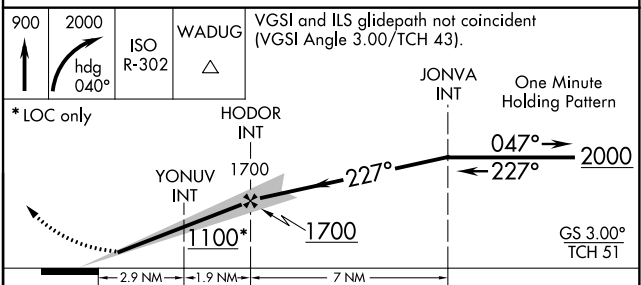

CATEGORY	A	B	C	D
S-ILS 23	333-3/4 200 (200-3/4)			
S-LOC 23	500-3/4	367 (400-3/4)	500-1	367 (400-1)
CIRCLING	580-1 447 (500-1)	640-1 507 (600-1)	760-1 3/4 627 (700-1 3/4)	760-2 627 (700-2)

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36