


WAAS CH 81929 W04A	APP CRS 044°	Rwy Idg 8075 TDZE 661 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 4R


CHICAGO O'HARE INTL (ORD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 4L. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR 

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct LAIRD and hold, continue climb-in-hold to 4000.

CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6
---	--	---	---	--------------------------

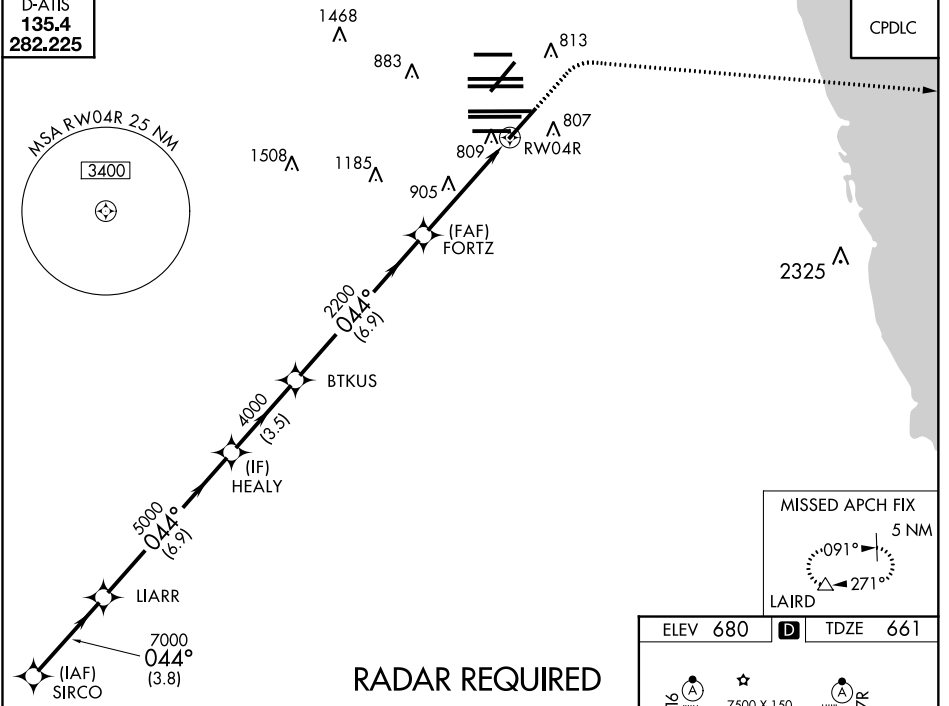

SIRCO		LIARR	HEALY	BTKUS	FORTZ	RW04R
8000		7000	5000	4000	2200	
GP 3.00° TCH 52		* LNAV only				
3.8 NM		6.9 NM	3.5 NM	6.9 NM	3.3 NM	1.4
CATEGORY	A	B		C	D	
LPV DA		861/18		200 (200-½)		
LNAV/VNAV DA		990/32		329 (400-¾)		
LNAV MDA	1160/24	499 (500-½)		1160/50		499 (500-1)
C CIRCLING	1220-1	540 (600-1)		1220-1½ 540 (600-1½)		1460-2½ 780 (800-2½)

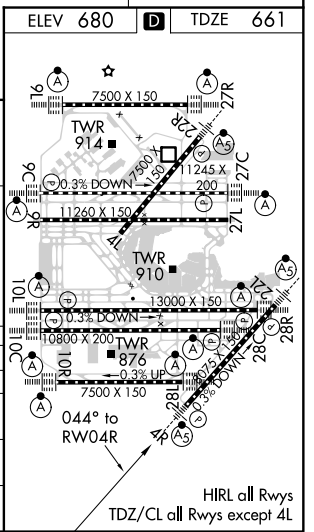

EC-3, 30 DEC 2021 to 27 JAN 2022

EC-3, 30 DEC 2021 to 27 JAN 2022