


WAAS CH 58143 W09D	APP CRS 093°	Rwy ldg TDZE Apt Elev	11245 673 680
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 9C

CHICAGO O'HARE INTL (O.R.D)






RNP APCH.

▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all cats visibility to RVR 4500 and LNAV Cat C/D to 1% SM.

ALSF-2 

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DEERE and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)				124.125 118.05 226.675	GND CON (TWR NORTH) (TWR SOUTH) (ALL TWRS)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)
--	--	---	--	--	--	---	---	---

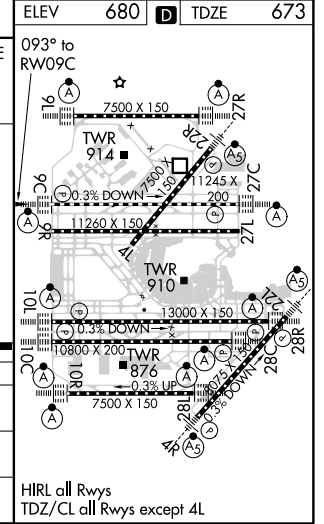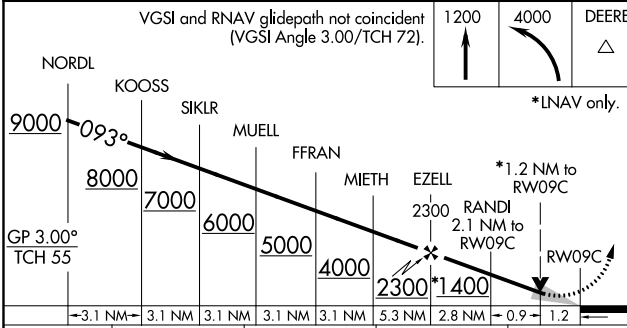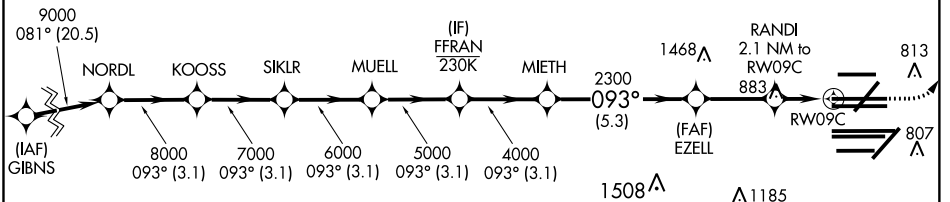

CATEGORY	A	B	C	D
LPV DA		873/18	200 (200-1/2)	
LNAV/VNAV DA		976/24	303 (300-1/2)	
LNAV MDA	1140/24	467 (500-1/2)	1140/50	467 (500-1)