RNAV (GPS) Y RWY 28L

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Idg	7500
CH 93839	275°	TDZE	667
W28E		Apt Elev	680

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWERS	GND CON	(TWR CENTER)
135.4	119.0 292.125	128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L)	124.125 (TWR NORTH)	121.75 (OBND)
282.225		120.75 121.15 126.9 132.7 348.0 (CENTER)	118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

CLNC DEL 121.6 CPDLC

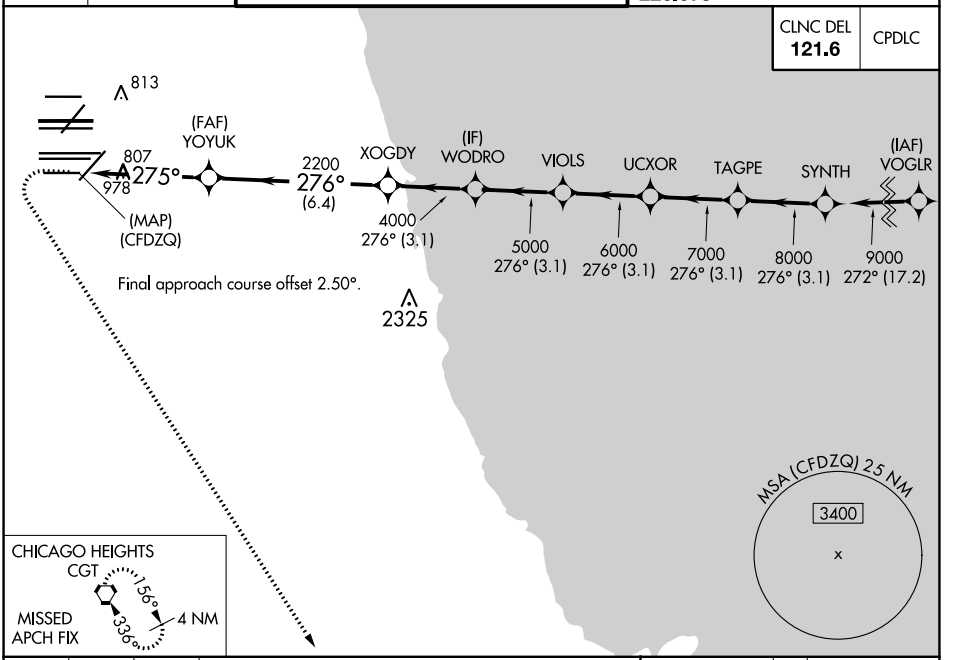

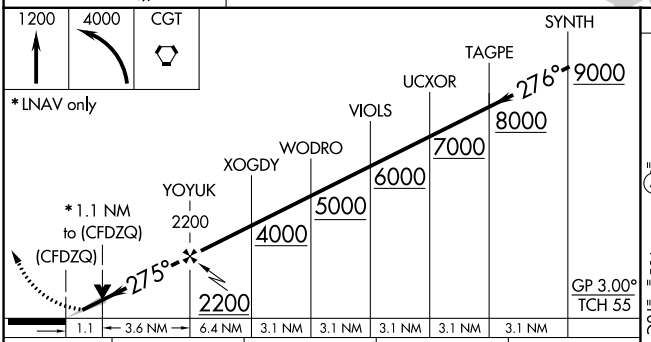

CATEGORY	A	B	C	D
LPV DA	917/24 250 (300-½)			
LNAV/VNAV DA	1090/40 423 (500-¾)			
LNAV MDA	1060/24 393 (400-½)		1060/35 393 (400-⅝)	

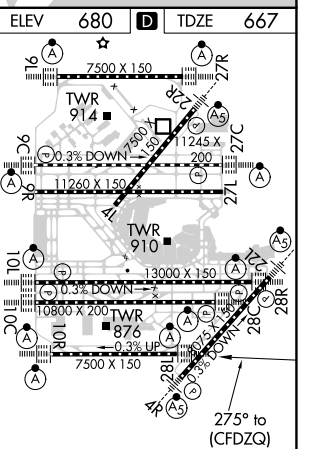

HIRL all Rwys
TDZ/CL all Rwys except 4L

EC-3, 30 DEC 2021 to 27 JAN 2022
EC-3, 30 DEC 2021 to 27 JAN 2022