

WAAS CH 77804 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	7782 654 680
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 27L




CHICAGO O'HARE INTL (ORD)

RNP APCH - GPS, RADAR required.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncomputerized Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

ALSF-2 MISSED APPROACH: Climb to 4000 direct WASCO and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292-125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 226.675 (CENTER)	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWS)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)
--	---	--	--	---

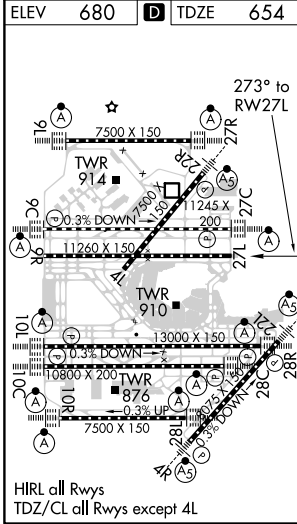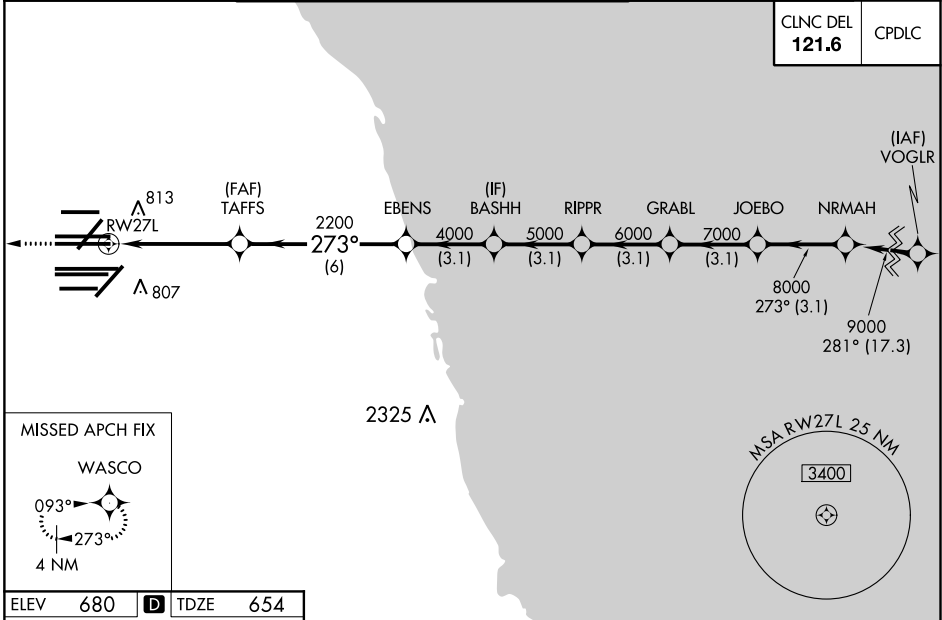

ELEV 680	TDZE 654	<table border="1"> <tr> <td>4000</td> <td>↑</td> <td>WASCO</td> <td>→</td> <td>↑</td> </tr> </table>				4000	↑	WASCO	→	↑
4000	↑	WASCO	→	↑						
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				
1.3	3.4	6	3.1	3.1	3.1	3.1	3.1			
2200	4000	5000	6000	7000	8000	9000				

GP 3.00° TCH 58

CATEGORY	A	B	C	D
LPV DA		854-3/4	200 (200-3/4)	
LNAV/VNAV DA		1088-1 1/4	434 (500-1 1/4)	
LNAV MDA	1120-1	466 (500-1)	1120-1 3/8	466 (500-1 3/8)