ILS or LOC RWY 19L

TAMPA INTL (TPA)

LOC I-TPA	APP CRS	Rwy Idg	8300
110.3	187°	TDZE	26
		Apt Elev	26

Simultaneous approach authorized. RADAR required. For inop ALS, increase S-ILS 19L Cat E visibility to RVR 4000 and S-LOC 19L Cat E visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 2800 on heading 160° and on PIE VORTAC R-138 to GIBBS INT/PIE 29.3 DME and hold.

ARR	D-ATIS	DEP	TAMPA APP CON	TAMPA TOWER	GND CON	CLNC DEL	CPDLC
126.45		128.475	118.5 307.175	119.5 269.4	121.7 269.4	133.6	

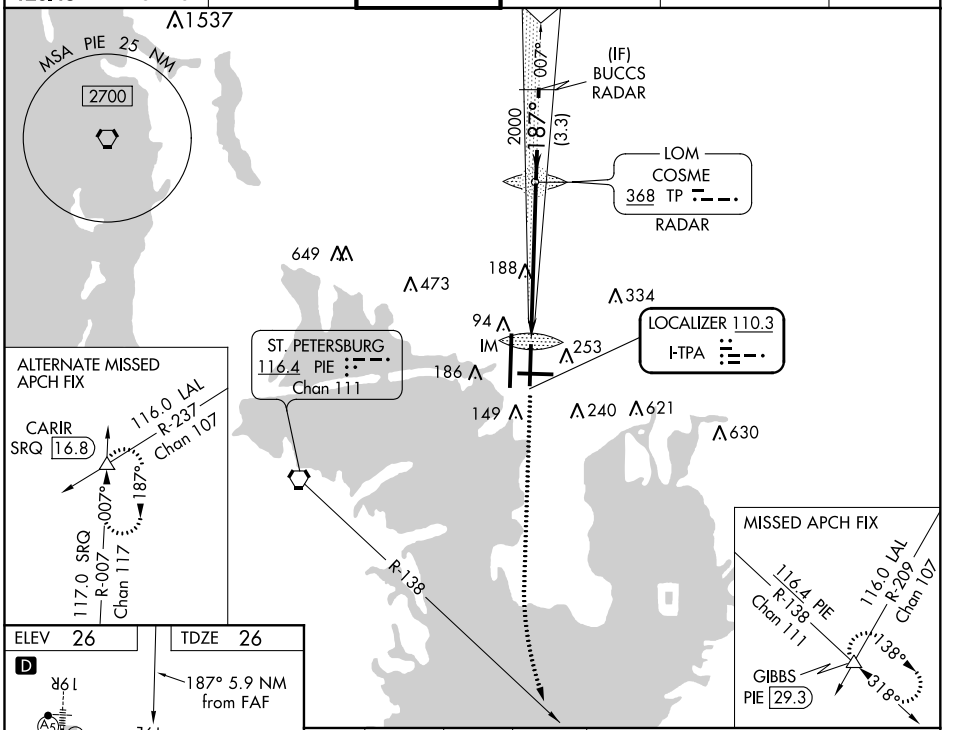

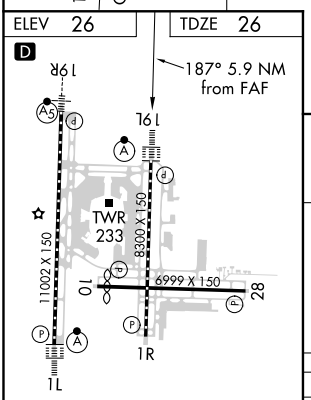

REIL Rwy 1R
TDZ/CL Rwys 1L and 19L
HIRL Rwys 1L-19R, 1R-19L, and 10-28

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

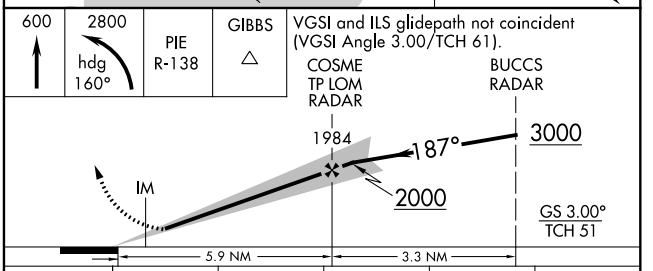

CATEGORY	A	B	C	D	E
S-ILS 19L	226/18 200 (200-½)				
S-LOC 19L	440/24 414 (500-½)		440/40 414 (500-¾)		
C CIRCLING	560-1 534 (600-1)		680-1¾ 654 (700-1¾)	980-3 954 (1000-3)	NA

SE-3, 30 DEC 2021 to 27 JAN 2022
SE-3, 30 DEC 2021 to 27 JAN 2022