RNAV (GPS) RWY 17

LIBERAL MID-AMERICA RGNL (LBL)

WAAS	APP CRS	Rwy Idg	7101
CH 78205	174°	TDZE	2878
W17A		Apt Elev	2886

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F).
Circling NA east of Rwy 17-35. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Guymon Muni altimeter setting: Increase all DA 112 feet and all MDA 120 feet; increase all visibilities ⅜ mile. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Guymon Muni altimeter setting. Baro-VNAV NA when using Guymon Muni altimeter setting.

MISSED APPROACH: Climb to 4500 direct OMVUE and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.375	134.0 257.865	122.8 (CTAF) L

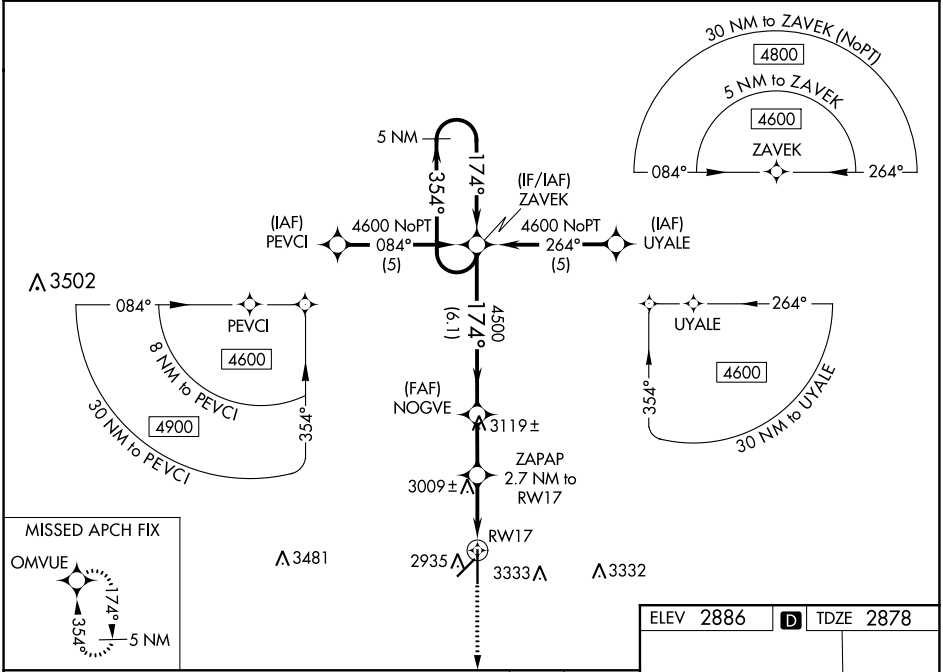

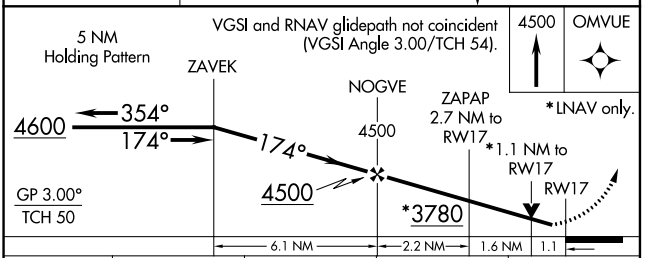

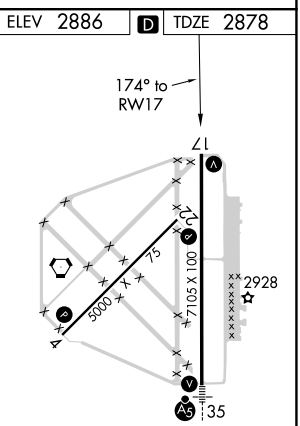

CATEGORY	A	B	C	D
LPV DA	3128-¾ 250 (300-¾)			
LNAV/VNAV DA	3320-1½ 442 (500-1½)			
LNAV MDA	3260-1 382 (400-1)		3260-1⅛ 382 (400-1⅛)	
C CIRCLING	3260-1 374 (400-1)	3340-1 454 (500-1)	3340-1½ 454 (500-1½)	3440-2 554 (600-2)

REIL Rwys 4, 17 and 22 L
MIRL Rwy 4-22 L
HIRL Rwy 17-35 L

NC-2, 30 DEC 2021 to 27 JAN 2022
NC-2, 30 DEC 2021 to 27 JAN 2022