RNAV (RNP) Z RWY 5R

RALEIGH-DURHAM INTL (RDU)

APP CRS	Rwy Idg	7500
054°	TDZE	420
	Apt Elev	435

RNP AR APCH-GPS.

T For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500. Simultaneous approach authorized, except for arrivals at STINT.

MALSR (A5)

MISSED APPROACH: Climb to 1000 then climbing right turn to 2600 direct ZEBUL and hold.

D-ATIS	RALEIGH APP CON	(EAST) RALEIGH TOWER (WEST)		GND CON		CLNC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8 Rwys 5R-23L and 14-32	119.3 257.8 Rwy 5L-23R	121.9 348.6 Rwys 5R-23L and 14-32	121.7 348.6 Rwy 5L-23R	120.1	

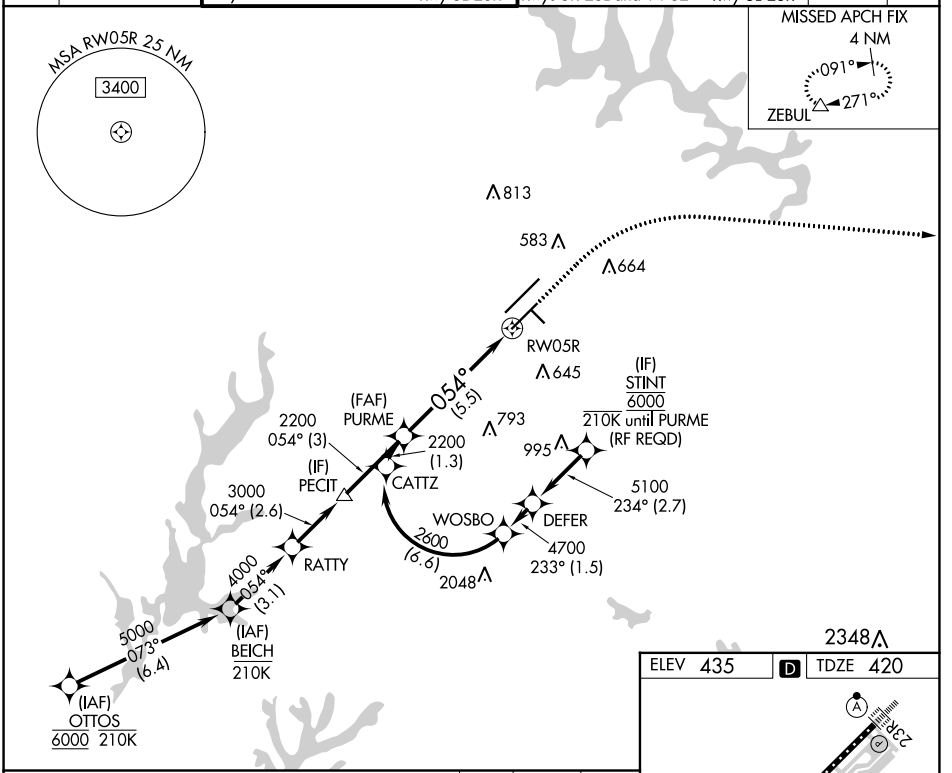

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 62).

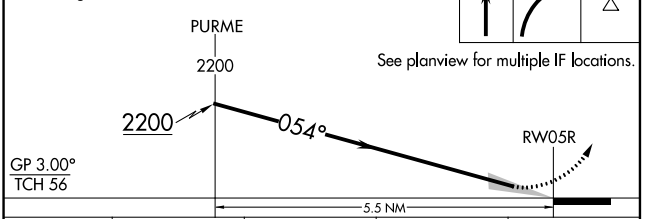

1000	2600	ZEBUL
↑	↗	△

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	692/24 272 (300-½)			

AUTHORIZATION REQUIRED

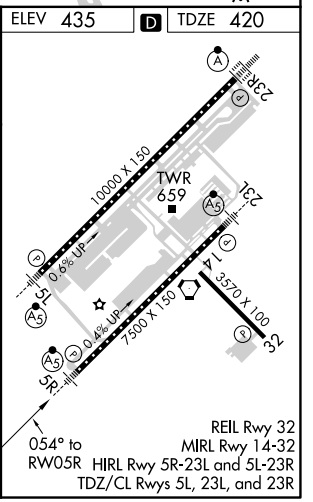

SE-2, 30 DEC 2021 to 27 JAN 2022