




|                         |                        |                             |   |
|-------------------------|------------------------|-----------------------------|---|
| LOC HBE<br><b>110.9</b> | APP CRS<br><b>236°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7372</b><br><b>1145</b><br><b>1199</b> |
|-------------------------|------------------------|-----------------------------|---|

# ILS or LOC RWY 24

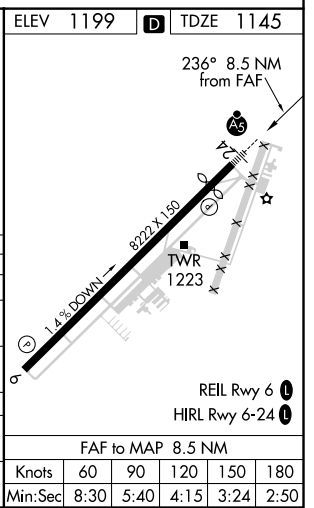
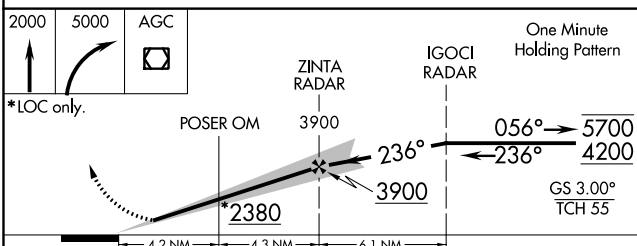
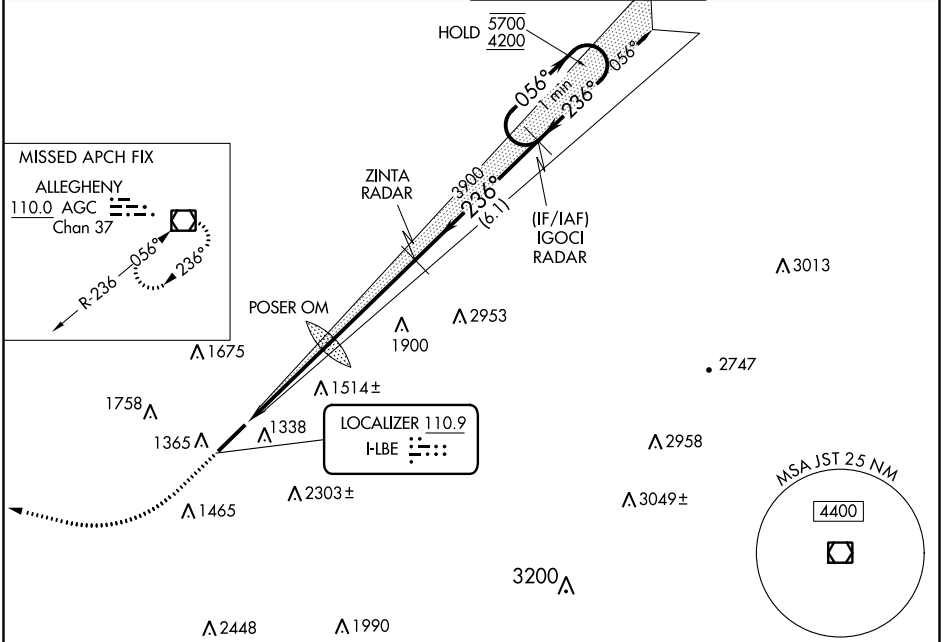
ARNOLD PALMER RGNL (LBE)



RNAV 1-GPS or RADAR required for procedure entry.  
From IGOCI: RNAV 1-GPS required.  
RADAR required.

MALSR  MISSED APPROACH: Climb to 2000 then climbing right turn to 5000 direct AGC VOR/DME and hold.

 Circling NA SE of Rwy 6-24. Inop table does not apply to S-LOC 24 Cats C/D.  
 For inop ALS, increase POSER OM minimums S-LOC 24 Cats C/D visibility to 1 1/4 SM.

|                        |   |                                       |                         |
|------------------------|---|---------------------------------------|-------------------------|
| ATIS<br><b>118.375</b> | JOHNSTOWN APP CON *<br><b>121.2 299.2</b> | PALMER TOWER *<br><b>125.0 (CTAF)</b> | GND CON<br><b>121.8</b> |
|------------------------|---|---------------------------------------|-------------------------|



| CATEGORY   | A                           | B                               | C                             | D                             |
|--|-----------------------------|---------------------------------|-------------------------------|-------------------------------|
| S-ILS 24   | 1345-1/2 200 (200-1/2)      |                                 |                               |                               |
| S-LOC 24   | 2380-3/4<br>1235 (1200-3/4) | 2380-1<br>1235 (1200-1)         | 2380-3                        | 1235 (1200-3)                 |
|  CIRCLING | 2380-1/4<br>1181 (1200-1/4) | 2380-1 1/2<br>1181 (1200-1 1/2) | 2380-3                        | 1181 (1200-3)                 |
| POSER OM MINIMUMS  |                             |                                 |                               |                               |
| S-LOC 24   | 1760-1/2 615 (600-1/2)      | 1760-1 3/8 615 (600-1 3/8)      |                               |                               |
|  CIRCLING | 1760-1<br>561 (600-1)       | 1780-1<br>581 (600-1)           | 2060-2 1/2<br>861 (900-2 1/2) | 2060-2 3/4<br>861 (900-2 3/4) |

NE-4, 30 DEC 2021 to 27 JAN 2022

NE-4, 30 DEC 2021 to 27 JAN 2022