WAAS	APP CRS	Rwy Idg 5501
CH 60933	097°	TDZE 621
W10A		Apt Elev 621

RNAV (GPS) RWY 10

MANISTEE COUNTY/BLACKER (MBL)

Night landing Rwy 1/19 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA with Ludington altimeter setting. Helicopter visibility reduction below ¾ SM not authorized. When local altimeter setting not received, use Ludington altimeter setting: increase LPV DA to 921 feet and all Cats visibility ¼ SM; increase LNAV/VNAV DA to 1141 feet and all Cats visibility ⅛ SM. Increase all MDA 60 feet and increase LNAV Cat C/D visibility ⅛ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct HALGI and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
111.4	120.85 322.35	122.8 (CTAF) L

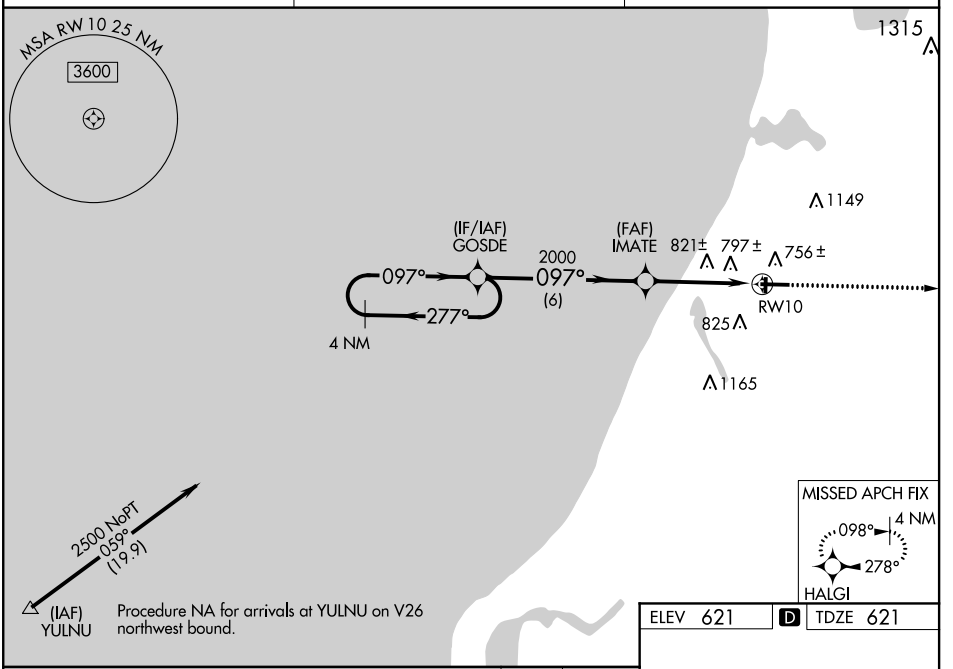

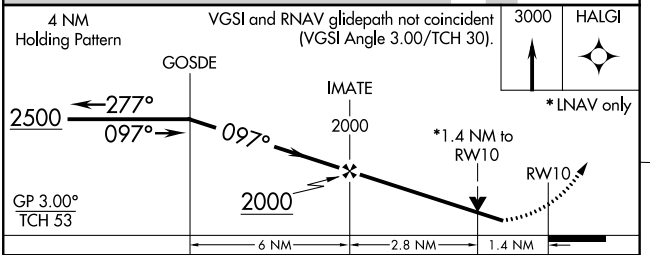

CATEGORY	A	B	C	D
LPV DA	871-¾ 250 (300-¾)			
LNAV/VNAV DA	1091-1⅝ 470 (500-1⅝)			
LNAV MDA	1080-1 459 (500-1)		1080-1⅜ 459 (500-1⅜)	
CIRCLING	1140-1 519 (600-1)	1200-1 579 (600-1)	1400-2¼ 779 (800-2¼)	1500-2¾ 879 (900-2¾)

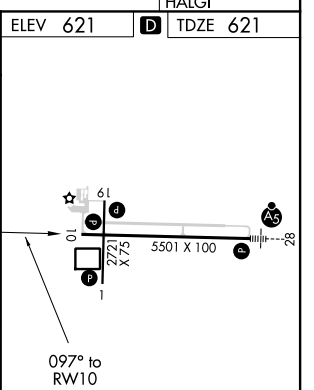

HIRL Rwys 10-28 L
MIRL Rwys 1-19 L
REIL Rwys 10 L

EC-1, 30 DEC 2021 to 27 JAN 2022
EC-1, 30 DEC 2021 to 27 JAN 2022