WAAS	APP CRS	Rwy Idg	3803
CH **78416**	**280°**	TDZE	**422**
W28A		Apt Elev	**424**

RNAV (GPS) RWY 28
WILLIAMSON-SODUS (SDC)

V
A NA

Baro-VNAV NA when using Rochester altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When VGSI inop, Straight-in and Circling Rwy 28 procedures NA at night. When VGSI inop, Circling Rwy 10 NA at night. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rochester altimeter setting and increase LPV DA 148 feet, LNAV/VNAV DA 77 feet, all MDA 80 feet, LPV all Cats visibility ½ mile, LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile and Circling Cat C visibility ½ mile.

MISSED APPROACH: Climb to 3000 direct GOYER and hold.

AWOS-3	ROCHESTER APP CON	UNICOM
124.2	**119.55 269.6**	**122.8** (CTAF) L

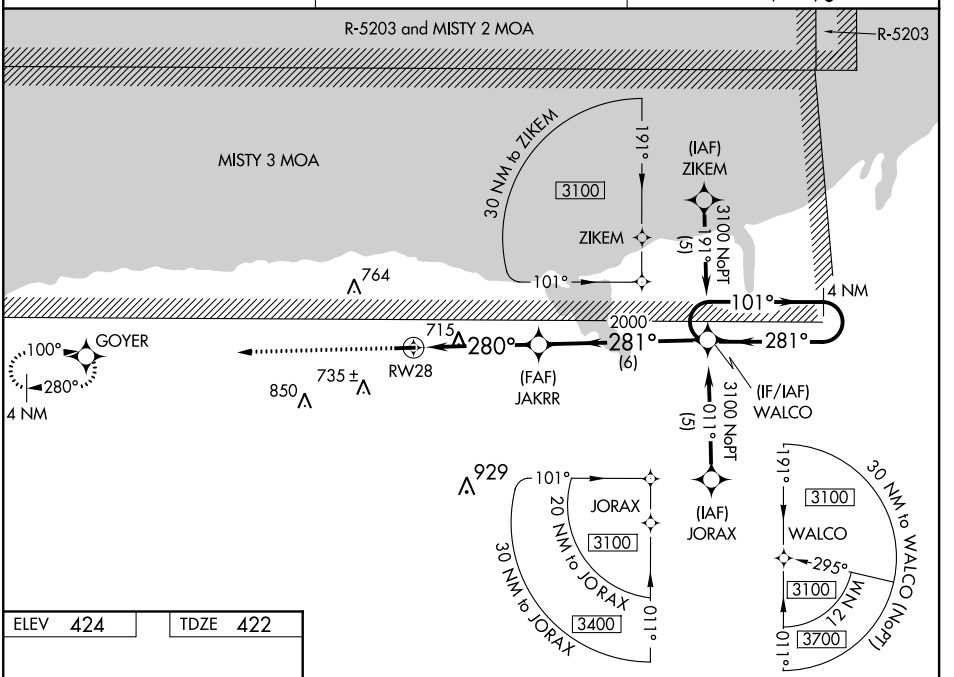



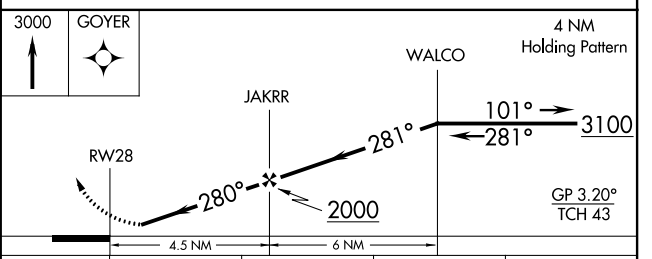

CATEGORY	A	B	C	D
LPV DA	706-1 284 (300-1)			NA
LNAV/VNAV DA	1048-2 626 (700-2)			NA
LNAV MDA	980-1 558 (600-1)		980-1½ 558 (600-1½)	NA
CIRCLING	1000-1 576 (600-1)		1020-1½ 596 (600-1½)	NA

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

NE-2, 30 DEC 2021 to 27 JAN 2022
NE-2, 30 DEC 2021 to 27 JAN 2022