

LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---



ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MALSRL MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF)
--------------------------	---	---------------------------	---------------------------------

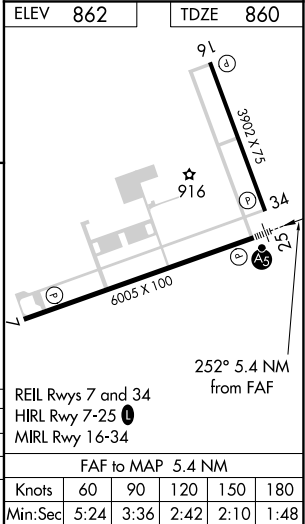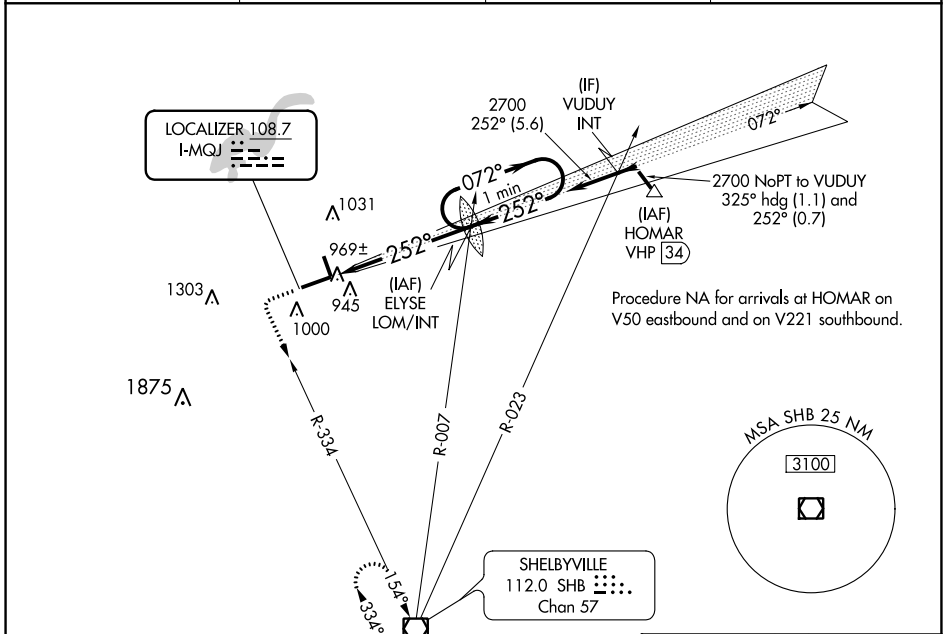

ELEV 862	TDZE 860
1400	2400
SHB	SHB R-334
ELYSE LOM/INT	One Minute Holding Pattern
2660	2700
072°	252°
GS 3.00°	TCH 53
5.4 NM	

CATEGORY	A	B	C	D	FAF to MAP 5.4 NM
S-ILS 25	1060-1/2 200 (200-1/2)				
S-LOC 25	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)	
CIRCLING	1340-1	478 (500-1)	1360-1 1/2	1660-2 1/2	
			498 (500-1 1/2)	798 (800-2 1/2)	
	Knots	60	90	120	150
	Min:Sec	5:24	3:36	2:42	2:10
		180	1:48		

EC-2, 30 DEC 2021 to 27 JAN 2022

EC-2, 30 DEC 2021 to 27 JAN 2022