

RNAV (GPS) RWY 1
NEW CASTLE (ILG)

NEW CASTLE (ILG)

WAAS CH 65815 W01A	APP CRS 015°	Rwy Idg 7012 TDZE 76 Apt Elev 80
--	------------------------	---


⚠ Inoperative table does not apply to LPV all Cats and LNAV Cats A and B.
⚠ Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).
 DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 380, LNAV/VNAV DA to 579, and all MDAs 60 feet; increase LNAV/VNAV all Cats visibility to RVR 6000 and Circling Cat D visibility ¼ SM. For inoperative MALSR, increase LNAV Cats C and D visibility ¼ mile. For inoperative MALSR, when using Philadelphia Intl altimeter setting, increase LNAV visibility Cat C ¼ mile.

MALSR



MISSED APPROACH:
Climb to 2000 direct
CUBBE and left turn
via track 265° to
TENPY and via track
214° to ELUDE and
hold.

ATIS 123.95	PHILADELPHIA APP CON 118.35 323.1	WILMINGTON TOWER★ 126.0 (CTAF) 352.05	GND CON 121.7 275.8	CLNC DEL 119.95	UNICOM 122.95
----------------	--------------------------------------	--	------------------------	--------------------	------------------

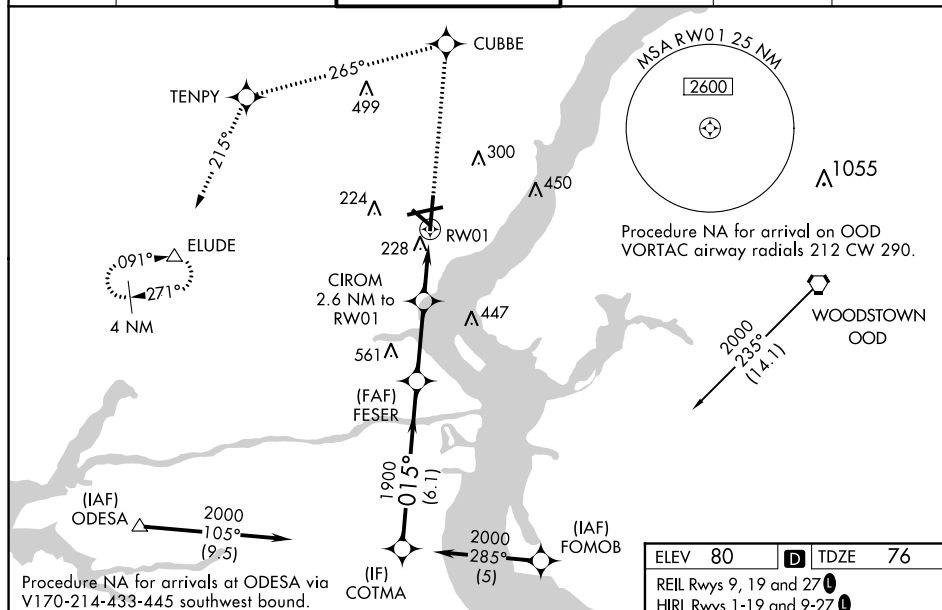

ELEV	80		TDZE	76
------	----	---	------	----

REIL Rwy 9, 19 and 27 **L**HIRL Rwy's 1-19 and 9-27 **L**MIRL Rwy 14-32 **L**