

WAAS
CH 40113
W08B

APP CRS
087°

Rwy Idg 10001
TDZE 794
Apt Elev 794

RNAV (GPS) RWY 8R

GERALD R FORD INTL (GRR)

RNP APCH.

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 2700 direct CAVUS and on track 085° to SARAN and hold.

ATIS
118.725


GREAT LAKES APP CON *
128.4 257.6

GRAND RAPIDS TOWER *
135.65 (CTAF) 339.8

GND CON
121.8

CLNC DEL
119.3

UNICOM
122.95

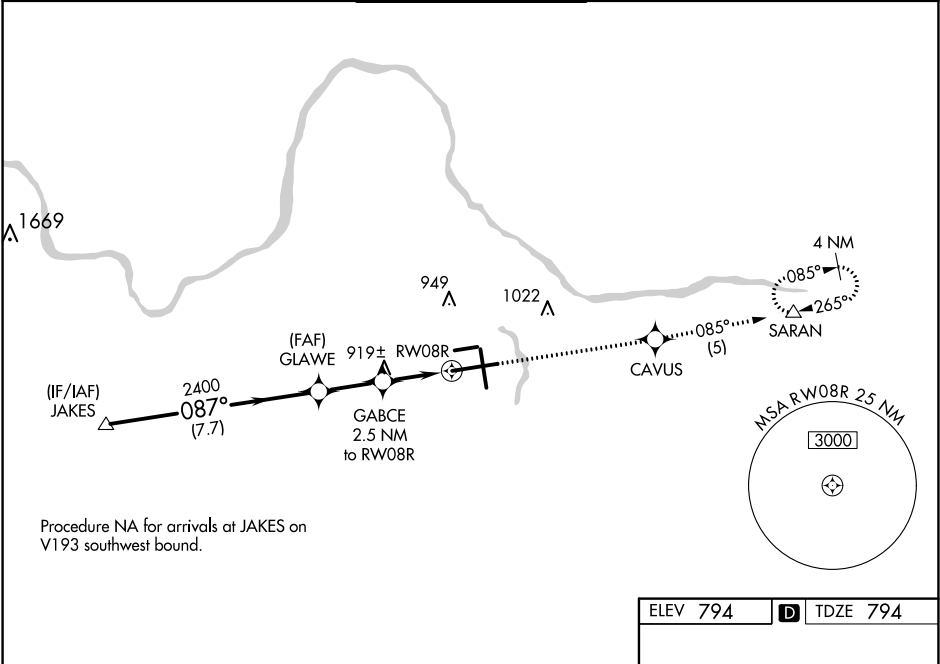

ELEV 794

TDZE 794

JAKES

2700

087°

GLAWE

2400

GP 3.00° TCH 51

GABCE 2.5 NM to RW08R

*1640

*1.1 NM to RW08R

RW08R

2700

CAVUS

tr 085°

SARAN

*LNAV only.

CATEGORY	A	B	C	D
LPV DA **	994/24 200 (200-½)			
LNAV/VNAV DA	1297/50 503 (600-1)			
LNAV MDA	1180/24 386 (400-½)	1180/35 386 (400-¾)		1180/50 386 (400-1)
CIRCLING	1260-1 466 (500-1)	1340-1½ 546 (600-1½)		1360-2 566 (600-2)

087° to RW08R

MIRL Rwy 8L-26R

REIL Rwy 8L, 17 and 26R

HIRL Rwy 8R-26L and 17-35