LOC I-SPW	APP CRS	Rwy Idg	6001
110.9	121°	TDZE	1339
		Apt Elev	1339

ILS or LOC RWY 12
SPENCER MUNI (SPW)

NA

For Inop ALS, increase S-LOC 12 Cats C/D visibility to 1⅜ SM. When local altimeter setting not received, use Estherville altimeter setting: increase DA and all MDAs 60 feet, increase visibility S-LOC 12 Cats C and D and Circling Cats C and D ¼ SM. For inop ALS, when using Estherville altimeter setting, increase S-ILS 12 all Cats visibility to 1 SM and S- LOC 12 Cats C/D visibility to 1⅝ SM. ADF or DME required.

MALSR

MISSED APPROACH: Climb to 3500 then right turn direct SPW VOR/DME, then via SPW VOR/DME R-302 to SNORE LOM/SPW VOR/DME 7 DME and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
126.625	127.75 257.7	123.0 (CTAF) L

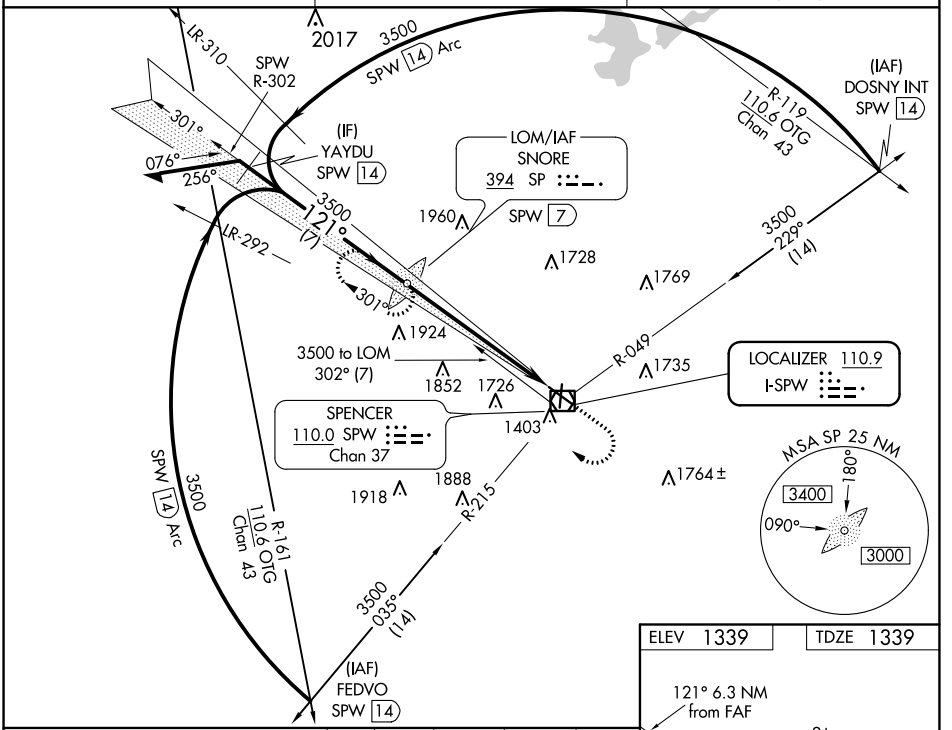

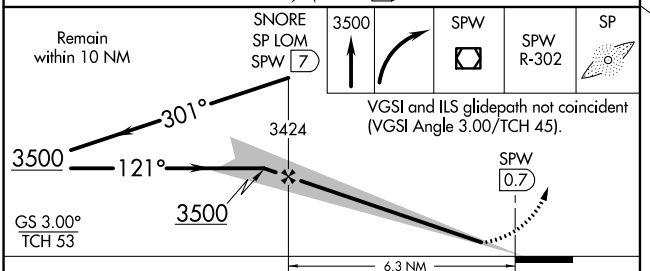



CATEGORY	A	B	C	D
S-ILS 12	1539-½ 200 (200-½)			
S-LOC 12	1840-½ 501 (600-½)		1840-1 501 (600-1)	
C CIRCLING	1840-1 501 (600-1)		2100-2¼ 761 (800-2¼)	2100-2½ 761 (800-2½)

REIL Rwys 18, 30 and 36 L
MIRL Rwys 12-30 and 18-36 L

FAF to MAP 6.3 NM					
Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

NC-3, 27 JAN 2022 to 24 FEB 2022
NC-3, 27 JAN 2022 to 24 FEB 2022