WAAS	APP CRS	Rwy Idg	5500
CH 90325	196°	TDZE	662
W20A		Apt Elev	666

RNAV (GPS) RWY 20

ROCK HILL/YORK COUNTY/BRYANT FIELD (UZA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Charlotte/Douglas Intl altimeter setting and increase all DA 45 feet and all MDA 60 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats ¼ mile, LNAV Cats C and D ¼ mile. VDP and Baro-VNAV NA when using Charlotte/Douglas Intl altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct CONEL and hold.

ASOS	CHARLOTTE APP CON		CLNC DEL	UNICOM
120.775	120.05	307.8	126.85	123.05 (CTAF) L

RADAR REQUIRED

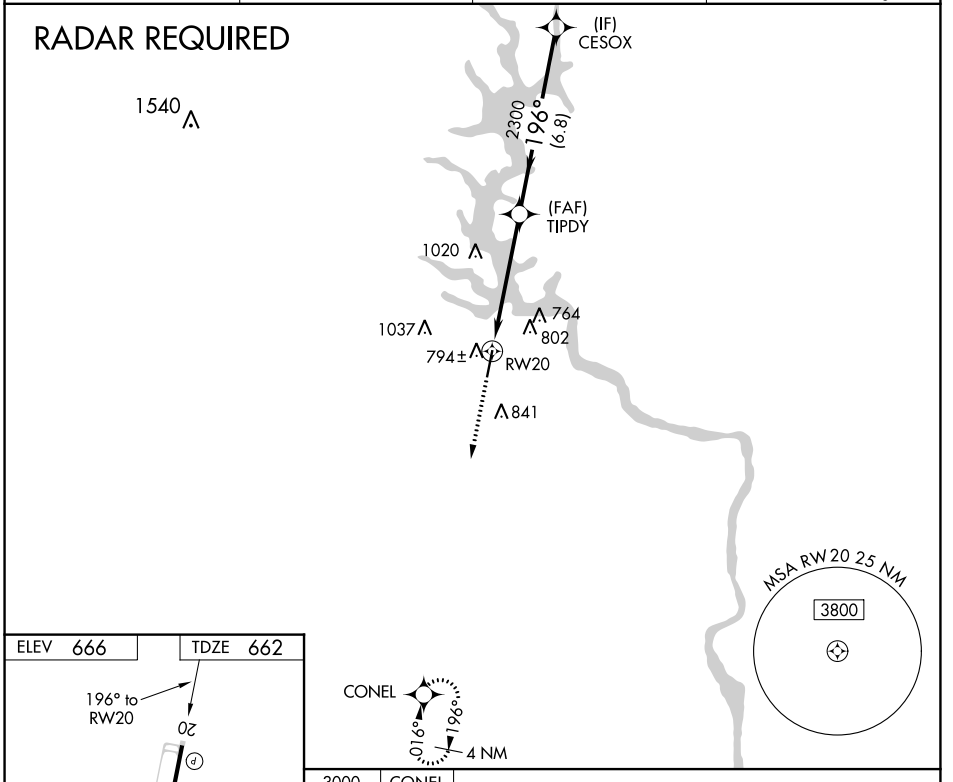

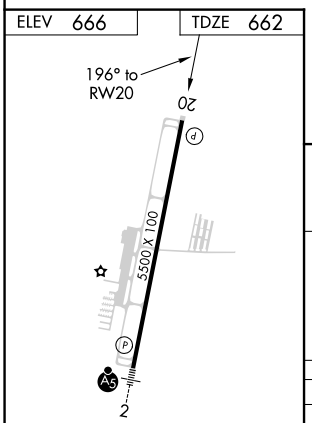

MIRL Rwy 2-20 L

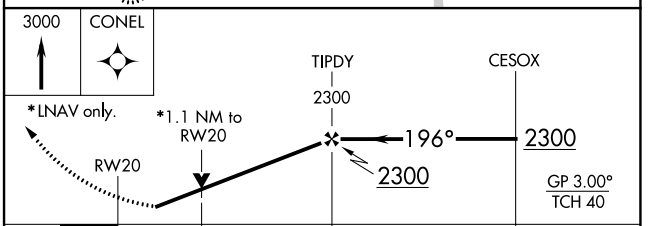

CATEGORY	A	B	C	D
LPV DA	912-⅞ 250 (300-⅞)			
LNAV/VNAV DA	1039-1¼ 377 (400-1¼)			
LNAV MDA	1060-1 398 (400-1)		1060-1⅛ 398 (400-1⅛)	
CIRCLING	1140-1 474 (500-1)		1200-1½ 534 (600-1½)	1220-2 554 (600-2)

SE-2, 27 JAN 2022 to 24 FEB 2022
SE-2, 27 JAN 2022 to 24 FEB 2022