

WAAS CH 97731 W28A	APP CRS 283°	Rwy Idg TDZE Apt Elev	5006 906 906
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

L O SIMENSTAD MUNI (OEO)

T


A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Anoka County-Blaine (Janes Fld) altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Anoka County-Blaine (Janes Fld) altimeter setting and increase all DA 57 feet and all MDA 60 feet. Increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ mile.

MISSED APPROACH:

Climb to 3000 direct WESUS and hold.

AWOS-3 119.925	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	CTAF 122.90
--------------------------	--	-----------------------	-----------------------

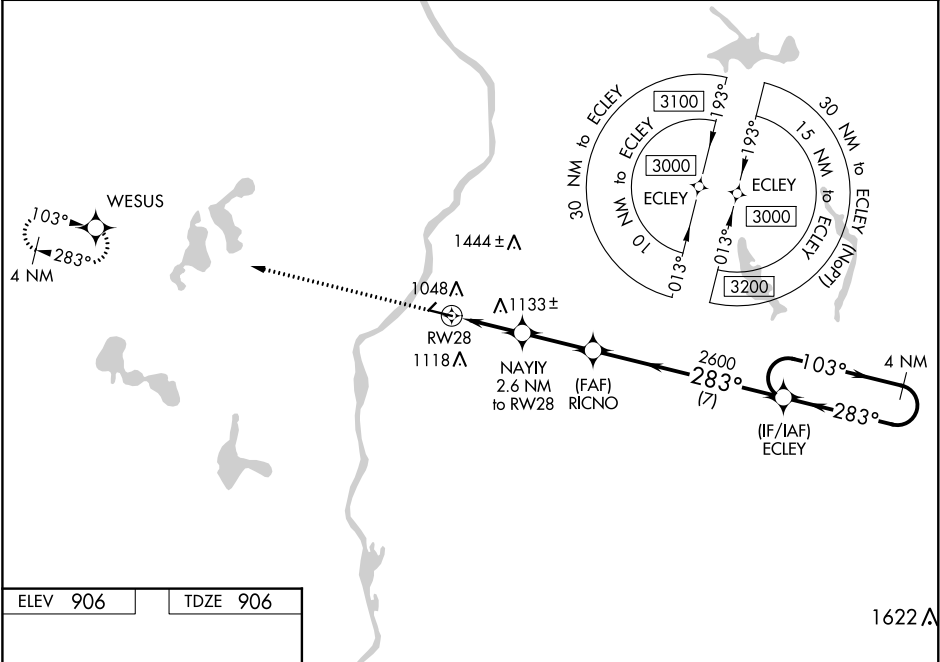

ELEV 906

TDZE 906

3000

WESUS

* LNAV only

NAYY 2.6 NM to RW28

RICNO 2600

ECLEY 3000

4 NM Holding Pattern

103°

283°

3000

GP 3.00° TCH 37

1.4 NM

1.2

2.6 NM

7 NM

1760*

2600

3000

REIL Rwy 28

MIRL Rwy 10 and 28

CATEGORY	A	B	C	D
LPV DA	1106-¾	200 (200-¾)		NA
LNAV/VNAV DA	1179-⅞	273 (300-⅞)		NA
LNAV MDA	1400-1	494 (500-1)	1400-1⅜ 494 (500-1⅜)	NA
CIRCLING	1400-1 494 (500-1)	1500-1 594 (600-1)	1520-1¾ 614 (700-1¾)	NA