

WAAS CH <b>82232</b> <b>W05A</b>	APP CRS <b>049°</b>	Rwy Idg TDZE Apt Elev	<b>6002</b> <b>96</b> <b>101</b>
--	------------------------	-----------------------------	--


# RNAV (GPS) RWY 5

LOWCOUNTRY RGNL (R.B.W)



**▼** For uncompensated Baro-VNAV systems, procedure NA below -1.5°C (5°F) or above 54°C (130°F).  
**▲** DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Charleston AFB/Intl altimeter setting.  
 Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase all DA 78 feet and all MDA 80 feet; increase LPV, LNAV/VNAV all Cats and Circling Cat D visibility 1/4 mile, increase LNAV Cat C - D visibility 1/8 mile, increase Circling Cat C visibility 1/2 mile.

**MISSED APPROACH:**  
 Climb to 2100 direct LAMKE and hold.

AWOS-3 <b>118.725</b>	CHARLESTON APP CON <b>120.7 306.925</b>	GCO <b>121.725</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	--	-----------------------	---------------------------------

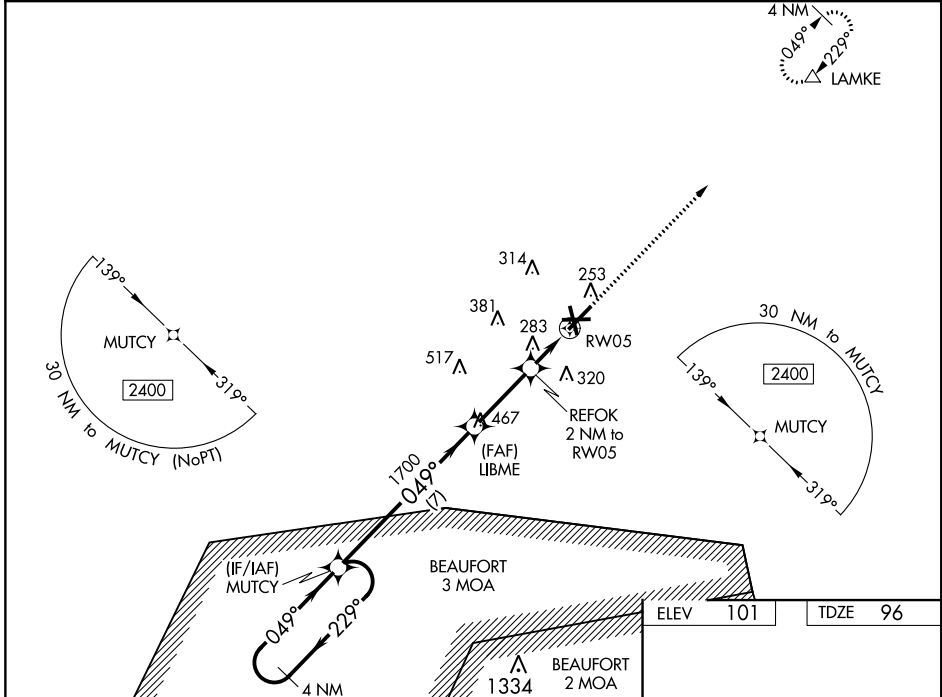

ELEV	101	TDZE	96
------	-----	------	----

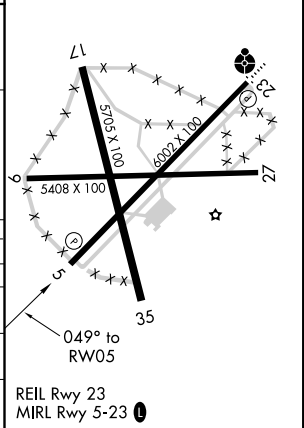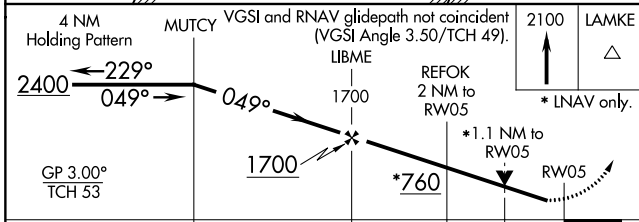

CATEGORY	A	B	C	D
LPV DA		431-1 1/8	335 (400-1 1/8)	
LNAV/VNAV DA		507-1 3/8	411 (500-1 3/8)	
LNAV MDA	540-1	444 (500-1)	540-1 3/8	444 (500-1 3/8)
<b>C</b> CIRCLING	620-1 519 (600-1)	640-1 539 (600-1)	700-1 1/2 599 (600-1 1/2)	700-2 599 (600-2)

REIL Rwy 23  
 MIRL Rwy 5-23 **0**

SE-2, 27 JAN 2022 to 24 FEB 2022

SE-2, 27 JAN 2022 to 24 FEB 2022