

WAAS CH 82013 W13A	APP CRS 133°	Rwy Idg TDZE Apt Elev	7500 1031 1031
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13


ST CLOUD RGNL (STC)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Little Falls altimeter setting. When local altimeter setting not received, use Little Falls altimeter setting; increase LPV DA to 1307 feet, LNAV/VNAV DA to 1531 feet and visibility LNAV/VNAV ½ SM all Cats; increase all MDA 80 feet and visibility Circling Cat C and D ½ SM. Circling to Rwy 5-23 NA at night. For inoperative MALSR, increase LNAV Cat D visibility ½ mile. For inop MALSR when using Little Falls altimeter setting, increase LPV all Cats visibility ½ mile.

MALSR

MISSED APPROACH:
Climb to 3000 direct
ZUXAL and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 397.9	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

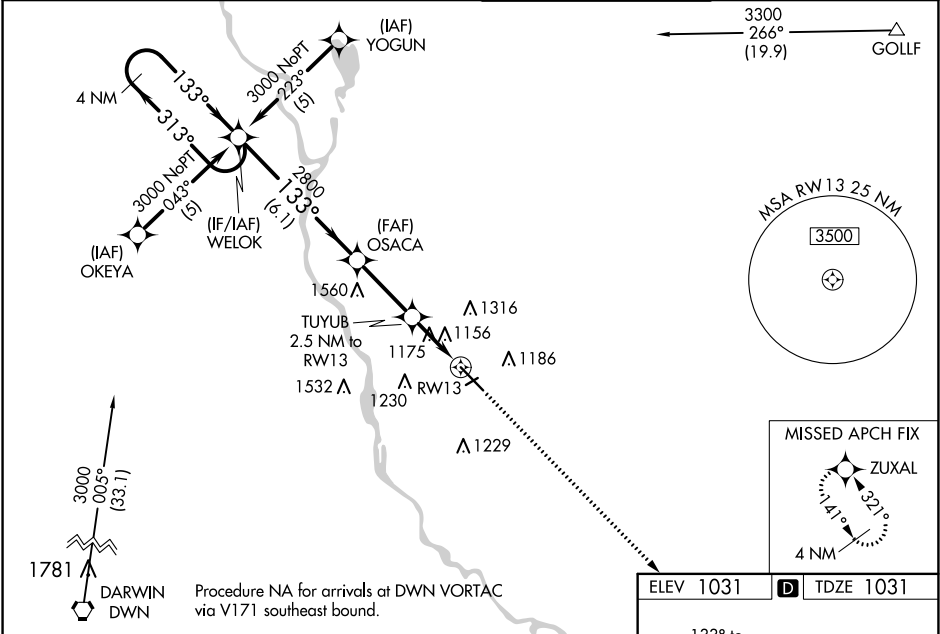

4 NM Holding Pattern

WELOK

OSACA

TUYUB 2.5 NM to RW13

*1880

*1.1 NM to RW13

RW13

GP 3.00° TCH 49

3000

2800

2800

133°

313°

133°

133° to RW13

ZUXAL

*LNAV only

CATEGORY	A	B	C	D
LPV DA		1231-½	200 (200-½)	
LNAV/VNAV DA		1455-1	424 (500-1)	
LNAV MDA	1440-½	409 (500-½)	1440-¾ 409 (500-¾)	1440-1 409 (500-1)
CIRCLING	1500-1	469 (500-1)	1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)

