

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-LHM | APP CRS | Rwy Idg  | 6001 |
| 108.75        | 151°    | TDZE     | 121  |
| Chan 24 (Y)   |         | Apt Elev | 121  |

ILS or LOC RWY 15




LINCOLN RGNL/KARL HARDER FLD (LHM)

**⚠** When local altimeter setting not received, use Beale AFB altimeter setting and increase DA to 361 feet and all MDAs 40 feet; increase S-LOC 15 Cat C/D and Circling Cat D visibility ¼ SM. VDP NA with Beale AFB altimeter setting. WIDBO fix minimums: for inop ALS, increase S-LOC 15 Cat D visibility to 1 mile.

**MALSR**

**MISSED APPROACH:** Climb to 1200 then climbing right turn to 3000 direct MYV VOR/DME and hold.

|                  |                               |                                 |
|------------------|-------------------------------|---------------------------------|
| AWOS-3<br>124.25 | NORCAL APP CON<br>125.4 259.1 | UNICOM<br>123.0 (CTAF) <b>0</b> |
|------------------|-------------------------------|---------------------------------|

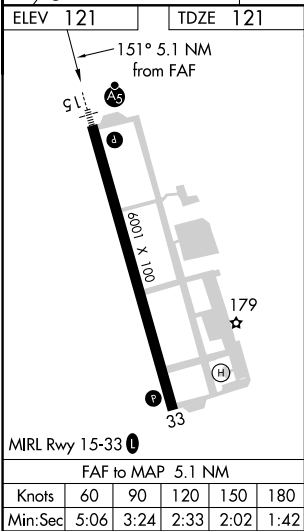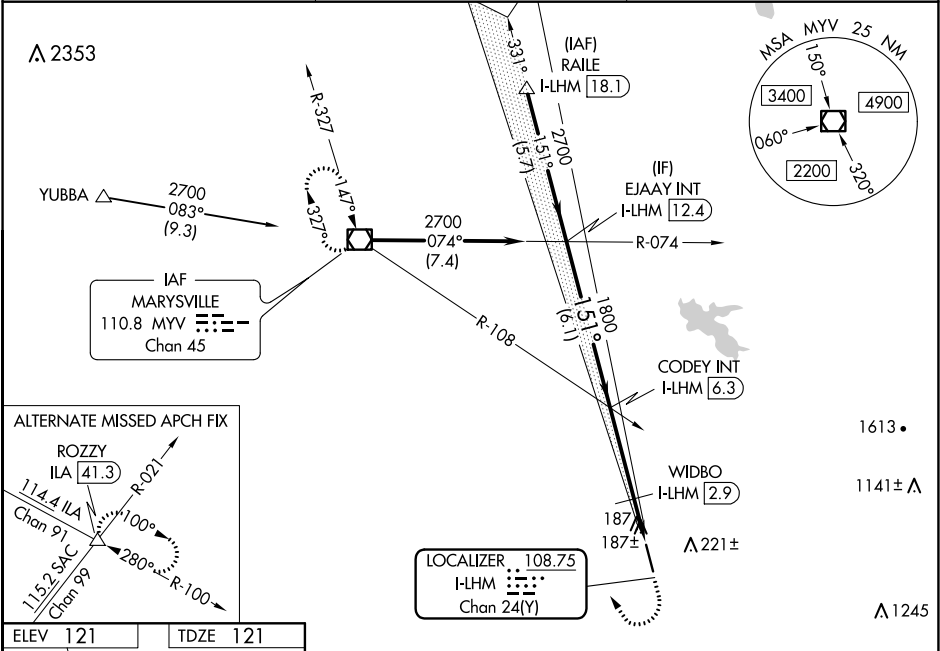

|                                                  |                   |   |                     |                                              |                     |                   |                   |                                    |                                   |                   |
|--------------------------------------------------|-------------------|---|---------------------|----------------------------------------------|---------------------|-------------------|-------------------|------------------------------------|-----------------------------------|-------------------|
| <div>EJAAY INT<br/>I-LHM <span>12.4</span></div> |                   |   |                     | #640 when using Beale AFB altimeter setting: |                     |                   |                   | 1200                               | 3000                              | MYV               |
| <div>CODEY INT<br/>I-LHM <span>6.3</span></div>  |                   |   |                     | <div>WIDBO<br/>I-LHM <span>2.9</span></div>  |                     |                   |                   | <div>↑</div>                       | <div></div>                       | <div></div>       |
| <div>2700</div>                                  |                   |   |                     | <div>1800</div>                              |                     |                   |                   | <div>*LOC only</div>               |                                   |                   |
| <div>GS 3.00°<br/>TCH 46°</div>                  |                   |   |                     | <div>*#600</div>                             |                     |                   |                   | <div>*I-LHM <span>2.1</span></div> | <div>I-LHM <span>1.2</span></div> |                   |
| <div>151°</div>                                  |                   |   |                     | <div>1800</div>                              |                     |                   |                   |                                    |                                   |                   |
| <div>6.1 NM</div>                                |                   |   |                     | <div>3.4 NM</div>                            |                     |                   |                   | <div>0.8 NM</div>                  |                                   | <div>0.9 NM</div> |
| CATEGORY                                         | A                 | B | C                   | D                                            |                     |                   |                   |                                    |                                   |                   |
| S-ILS 15                                         | 321-½ 200 (200-½) |   |                     |                                              |                     |                   |                   |                                    |                                   |                   |
| S-LOC 15                                         | 600-½ 479 (500-½) |   | 600-¾ 479 (500-¾)   |                                              |                     | 600-1 479 (500-1) |                   |                                    |                                   |                   |
| CIRCLING                                         | 600-1 479 (500-1) |   | 600-1½ 479 (500-1½) |                                              |                     | 760-2 639 (700-2) |                   |                                    |                                   |                   |
| WIDBO FIX MINIMUMS                               |                   |   |                     |                                              |                     |                   |                   |                                    |                                   |                   |
| S-LOC 15                                         | 460-½ 339 (400-½) |   |                     |                                              |                     | 460-¾ 339 (400-¾) |                   |                                    |                                   |                   |
| CIRCLING                                         | 520-1 399 (400-1) |   | 580-1 459 (500-1)   |                                              | 600-1½ 479 (500-1½) |                   | 760-2 639 (700-2) |                                    |                                   |                   |