

WAAS Ch 42817 W23A	APP CRS 228°	Rwy Idg TDZE Apt Elev	5002 1013 1013
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 23
PICKENS COUNTY (LQK)

▼
▲ NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1356 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1594 feet; increase all MDAs 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM, increase LNAV Cat D visibility ⅓ SM. Baro-VNAV NA when using Clemson altimeter setting. VDP NA with Clemson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct ZAKOB and hold.

AWOS-3 120.0	GREER APP CON ★ 118.8 270.275	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

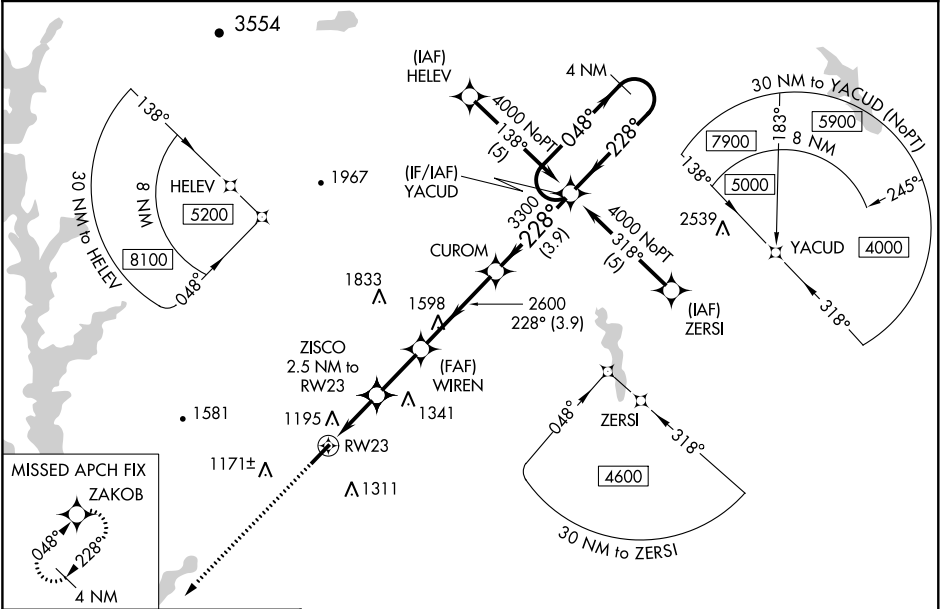

ELEV 1013	TDZE 1013
-----------	-----------

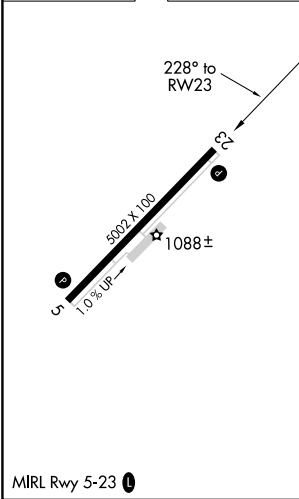

3000	ZAKOB	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 26).				4 NM Holding Pattern
* LNAV only.	ZISCO 2.5 NM to RW23	WIREN 2600	CUROM	YACUD	4000	GP 3.00° TCH 45
	1.5 NM to RW23	1860*	2600	3300	228°	
	1.5 NM	1 NM	2.3 NM	3.9 NM	3.9 NM	
CATEGORY	A	B	C	D		
LPV DA	1310-1		297 (300-1)			
LNAV/VNAV DA	1548-2		535 (600-2)			
LNAV MDA	1500-1	487 (500-1)	1500-1 3/8 487 (500-1 3/8)	1500-1 1/2 487 (500-1 1/2)		
CIRCLING	1560-1 547 (600-1)	1620-1 607 (700-1)	1620-1 3/4 607 (700-1 3/4)	1780-2 1/2 767 (800-2 1/2)		

SE-2, 27 JAN 2022 to 24 FEB 2022

SE-2, 27 JAN 2022 to 24 FEB 2022