

WAAS CH 82330 W29A	APP CRS 291°	Rwy Idg TDZE Apt Elev	5001 1164 1171
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 29

IOWA COUNTY (MR.J)


⚠ Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility 1/4 mile, increase all MDA 60 feet and LNAV Cat C visibility 1/4 mile. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3500 direct YIDUC and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

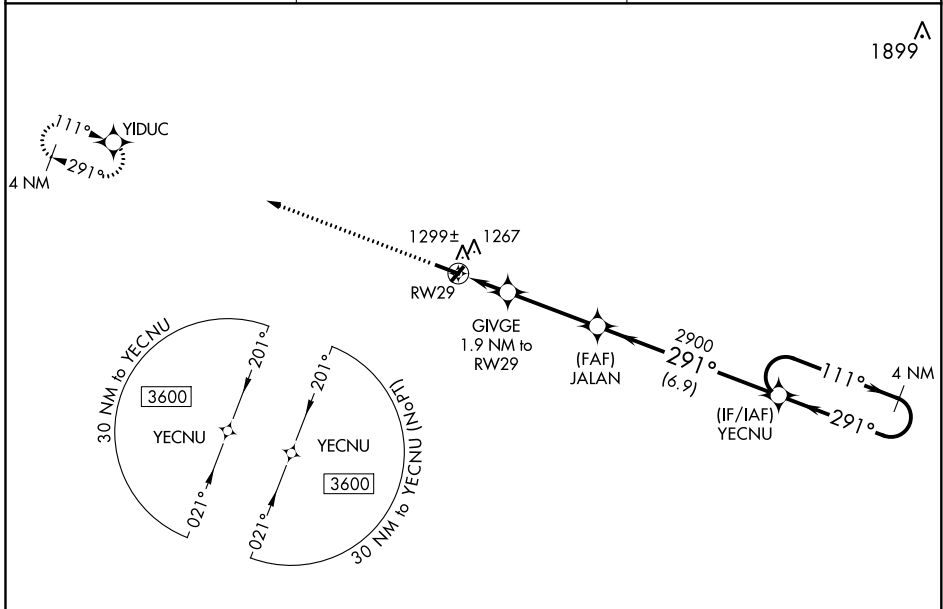

ELEV 1171	TDZE 1164
-----------	-----------

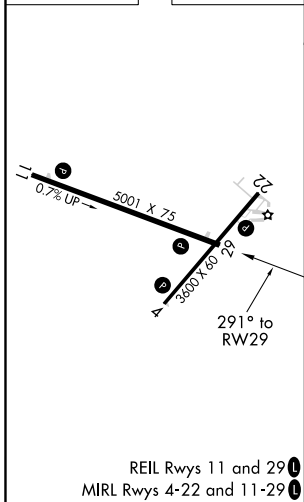

3500	YIDUC	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).	4 NM Holding Pattern
* LNAV only	GIVGE 1.9 NM to RWY 29	JALAN 2900	YECNU 3600
* 1.1 NM to RWY 29	RWY 29	* 1800	GP 3.00° TCH 40
-1.1 - 0.8 - 3.4 NM		6.9 NM	

CATEGORY	A	B	C	D
LPV DA	1414-7/8		250 (300-7/8)	NA
LNAV/VNAV DA	1469-1		305 (300-1)	NA
LNAV MDA	1580-1	416 (500-1)	1580-1 1/8 416 (500-1 1/8)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 1/2 469 (500-1 1/2)	NA

EC-3, 27 JAN 2022 to 24 FEB 2022

EC-3, 27 JAN 2022 to 24 FEB 2022