

|                          |                 |                             |                      |
|--------------------------|-----------------|-----------------------------|----------------------|
| WAAS<br>CH 42538<br>W31A | APP CRS<br>313° | Rwy Idg<br>TDZE<br>Apt Elev | 5701<br>2965<br>2965 |
|--------------------------|-----------------|-----------------------------|----------------------|


RNAV (GPS) RWY 31

BOWMAN RGNL (BWW)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, increase LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Hettinger altimeter setting.

MISSED APPROACH:  
Climb to 3500 then  
climbing right turn to  
6000 direct HAYNI  
and hold.

|                     |                                       |                        |
|---------------------|---------------------------------------|------------------------|
| AWOS-3PT<br>118.075 | SALT LAKE CITY CENTER<br>126.85 305.2 | UNICOM<br>122.8 (CTAF) |
|---------------------|---------------------------------------|------------------------|

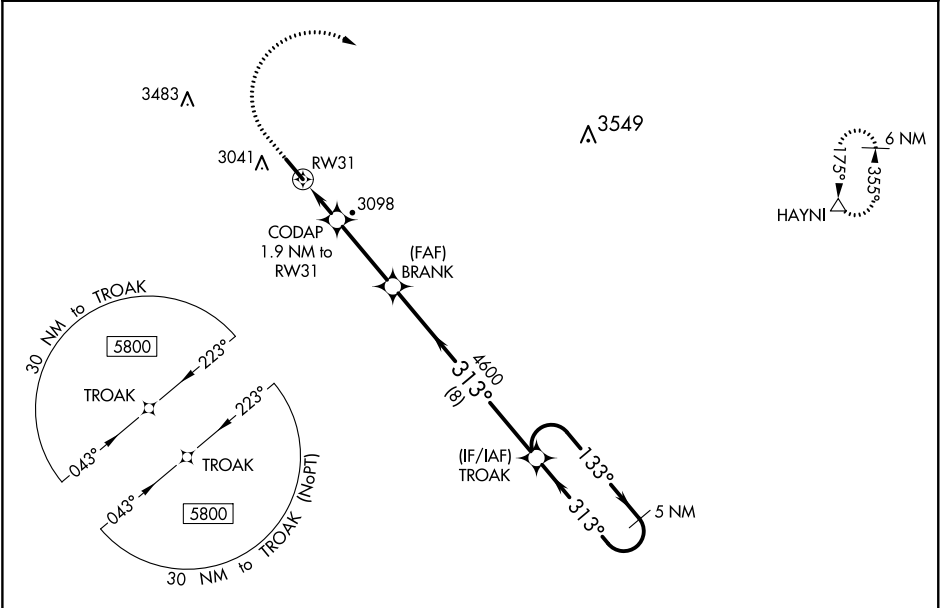

|           |           |
|-----------|-----------|
| ELEV 2965 | TDZE 2965 |
|-----------|-----------|

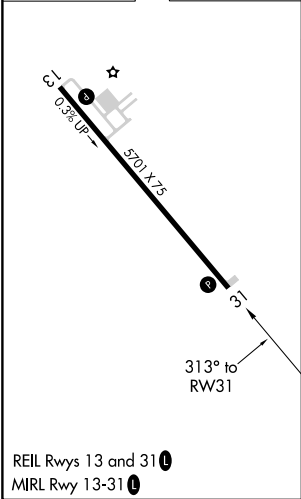

|              |                    |                      |                      |                            |
|--------------|--------------------|----------------------|----------------------|----------------------------|
|              | 3500               | 6000                 | HAYNI                |                            |
|              | ↑                  | ↪                    | △                    |                            |
|              | *LNAV only         | CODAP 1.9 NM to RW31 | BRANK                | TROAK 5 NM Holding Pattern |
|              |                    | *1.1 NM to RW31      | 4600                 | 133° 5800                  |
|              |                    | *3600                | 4600                 | GP 3.00° TCH 40            |
|              | 1.1 NM             | 0.8 NM               | 3.1 NM               | 8 NM                       |
| CATEGORY     | A                  | B                    | C                    | D                          |
| LPV DA       |                    | 3215-1               | 250 (300-1)          |                            |
| LNAV/VNAV DA |                    | 3227-1               | 262 (300-1)          |                            |
| LNAV MDA     | 3360-1             | 395 (400-1)          | 3360-1½              | 395 (400-1½)               |
| CIRCLING     | 3380-1 415 (500-1) | 3420-1 455 (500-1)   | 3580-1¾ 615 (700-1¾) | 3580-2 615 (700-2)         |

NC-1, 27 JAN 2022 to 24 FEB 2022

NC-1, 27 JAN 2022 to 24 FEB 2022