


ILS or LOC RWY 22

LOC I-BIX 109.7	APCH CRS 217°	Rwy Idg THRE Arpt Elev 6630 17 33	AL-49 [USAF]	KEESLER AFB (KBIX)
RADAR or DME required.			ALSf-1 	† MISSED APPROACH: Climb to 800 tracking 217°, upon reaching 800 turn left to intercept BIX TACAN R-186 climbing to 2200 to 11 DME (RUDfL) and hold.
 * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/2 miles.				
ATIS 281.55	GULFPORT APP CON 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)		KEESLER TOWER ★ 120.75 269.075	GND CON 121.8 275.8 CLNC DEL 121.8 275.8

† Missed approach requires use of RNAV or ATC RADAR monitoring.
Non-TACAN equipped aircraft expect ATC instructions.

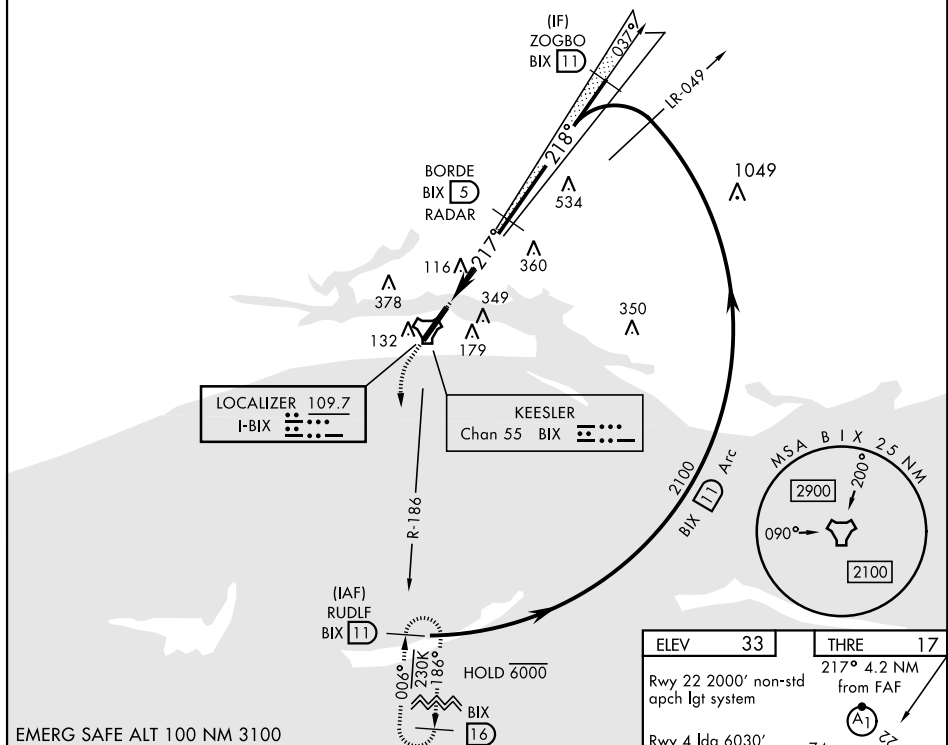

CATEGORY	A	B	C	D
S-ILS 22	217/40	200	(200-¾)	
S-LOC 22*	540/40 523 (600-¾)	540-1¼ 523 (600-1¼)		
CIRCLING	580-1 547 (600-1)	660-1 627 (700-1)	680-1¼ 647 (700-1¼)	680-2 647 (700-2)