



WAAS CH 93839 W28E	APP CRS 275°	Rwy Idg TDZE 667 Apt Elev 680
--	------------------------	---

RNAV (GPS) Y RWY 28L
CHICAGO O'HARE INTL (ORD)

RNP APCH		ALSIF-2		MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.		A			
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6 CPDLC

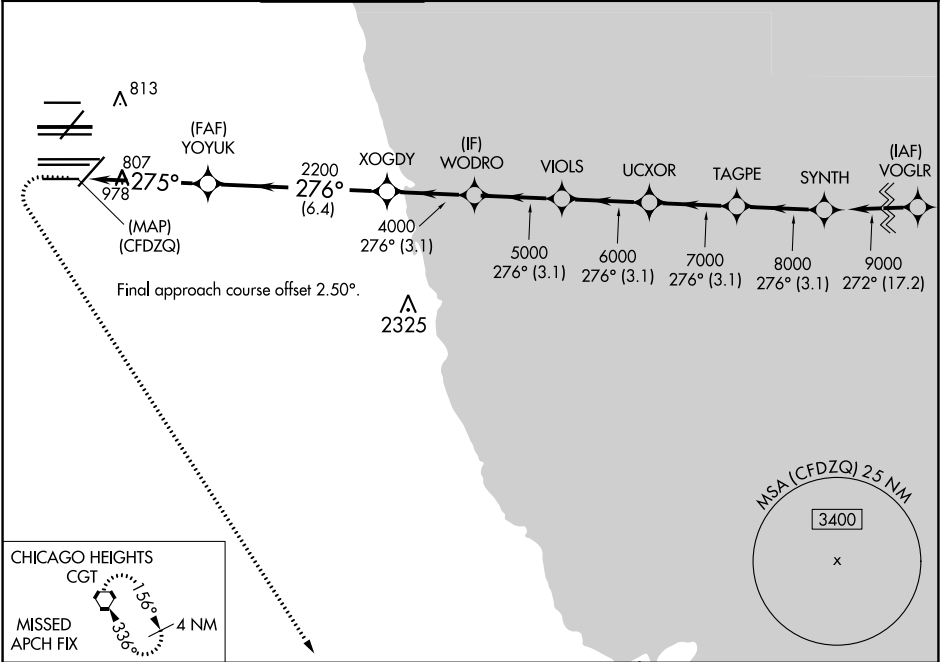

1200 4000 CGT		SYNTH	
* LNAV only		TAGPE 9000	
* 1.1 NM to (CFDZQ)		UCXOR 7000	
YOYUK 2200		VIOLS 6000	
XOGDY 4000		WODRO 5000	
2200		276° 276° 276° 276° 276°	
1.1 3.6 NM 6.4 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM		GP 3.00° TCH 55	
CATEGORY	A	B	C
LPV DA	917/24		250 (300-½)
LNAV/VNAV DA	1090/40		423 (500-¾)
LNAV MDA	1060/24	393 (400-½)	1060/35 393 (400-⅝)

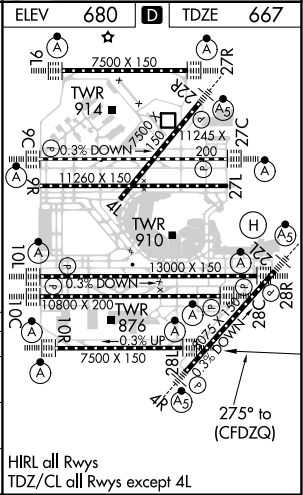

EC-3, 21 APR 2022 to 19 MAY 2022

EC-3, 21 APR 2022 to 19 MAY 2022