



WAAS CH 77804 W27A	APP CRS 273°	Rwy Idg 10260 TDZE 654 Apt Elev 680
--	------------------------	--

RNAV (GPS) Z RWY 27L
CHICAGO O'HARE INTL (ORD)

RNP APCH - GPS, RADAR required.				ALSIF-2 		MISSED APPROACH: Climb to 4000 direct WASCO and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.							
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC	

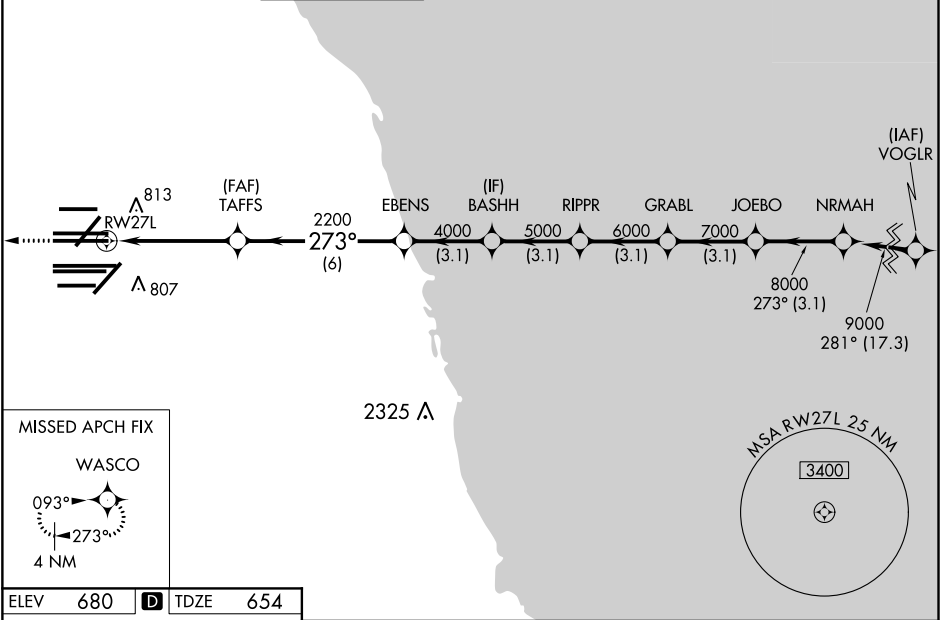

ELEV 680	D	TDZE 654
----------	----------	----------

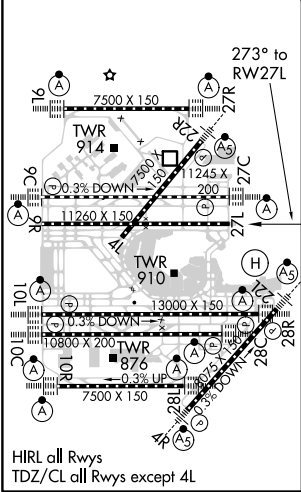

4000 WASCO		NRMAH	
1.3 3.4 NM		273° 9000	
TAFSS 2200		GRABL JOEBO	
1.3 NM to RWY 27L		7000	
2200		8000	
CATEGORY A		GP 3.00° TCH 58	
LPV DA		854-3/4 200 (200-3/4)	
LNAV/VNAV DA		1088-1 1/4 434 (500-1 1/4)	
LNAV MDA		1120-1 466 (500-1) 1120-1 3/8 466 (500-1 3/8)	