

|           |         |          |      |
|-----------|---------|----------|------|
| TACAN EFD | APP CRS | Rwy Idg  | 9001 |
| Chan 31   | 163°    | TDZE     | 32   |
| (109.4)   |         | Apt Elev | 33   |

TACAN RWY 17R

ELLINGTON (EFD)

⚠


NA

When ALS inop, increase visibility Cat A/B to RVR 5500 and Cat C/D/E visibility to 1½ miles.  
Circling NA west of Rwy 17R-35L.

MALSF

MISSED APPROACH: Climbing left turn to 3100 on EFD TACAN R-136 to WATFO/EFD 16 DME and hold.

|               |                 |                 |             |
|---------------|-----------------|-----------------|-------------|
| ATIS          | HOUSTON APP CON | ELLINGTON TOWER | GND CON     |
| 135.575 269.9 | 134.45 284.0    | 126.05 253.5    | 121.6 275.8 |

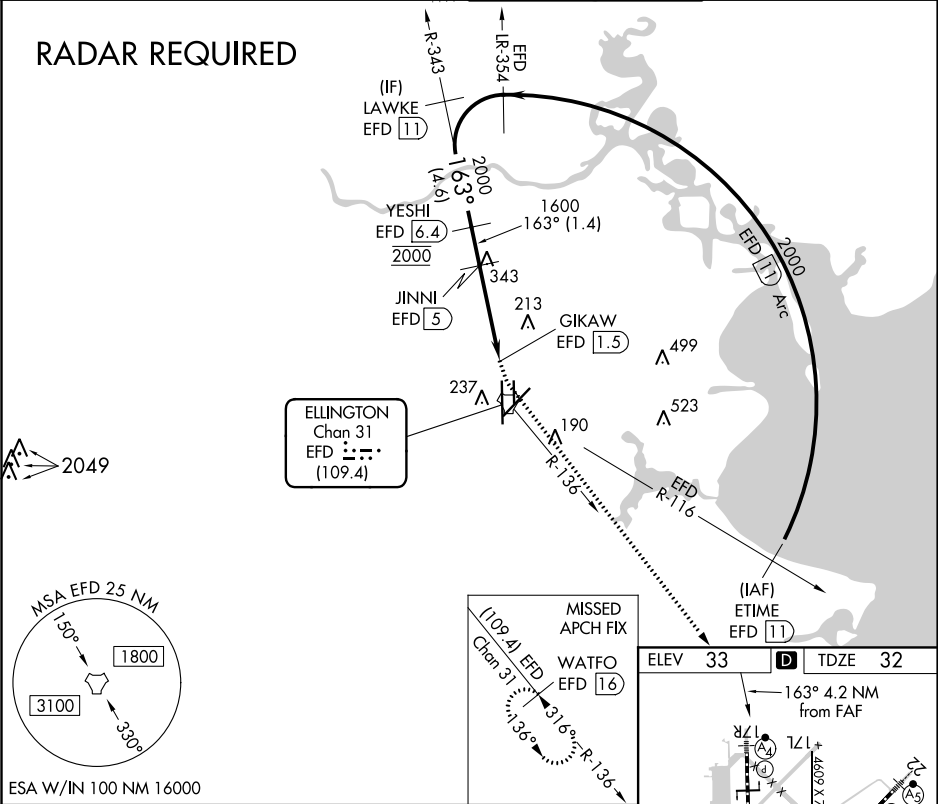

|                                                                  |              |               |                        |                      |                        |
|------------------------------------------------------------------|--------------|---------------|------------------------|----------------------|------------------------|
| VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 48). |              |               |                        |                      |                        |
| ETIME EFD 11                                                     | LAWKE EFD 11 | YESHI EFD 6.4 | JINNI EFD 5            | GIKAW EFD 1.5        | WATFO EFD 16           |
| 2000                                                             | 2000         | 2000          | 1600                   | 1600                 | 3100                   |
| 163°                                                             |              |               |                        |                      |                        |
| 3.39° TCH 50                                                     |              |               |                        |                      |                        |
| 4.6 NM 1.4 2.8 NM 0.7 0.7                                        |              |               |                        |                      |                        |
| CATEGORY                                                         | A            | B             | C                      | D                    | E                      |
| S-17R                                                            | 500/40       | 468 (500-¾)   | 500/60                 | 468 (500-1¼)         |                        |
| CIRCLING                                                         | 500-1        | 467 (500-1)   | 580-1½<br>547 (600-1½) | 640-2<br>607 (700-2) | 700-2¼<br>667 (700-2¼) |

