
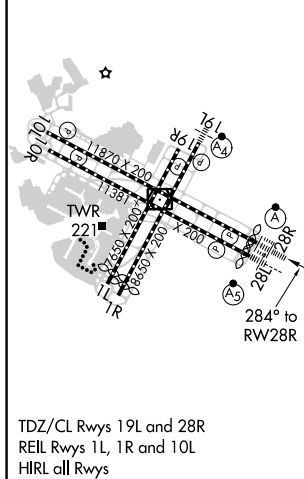
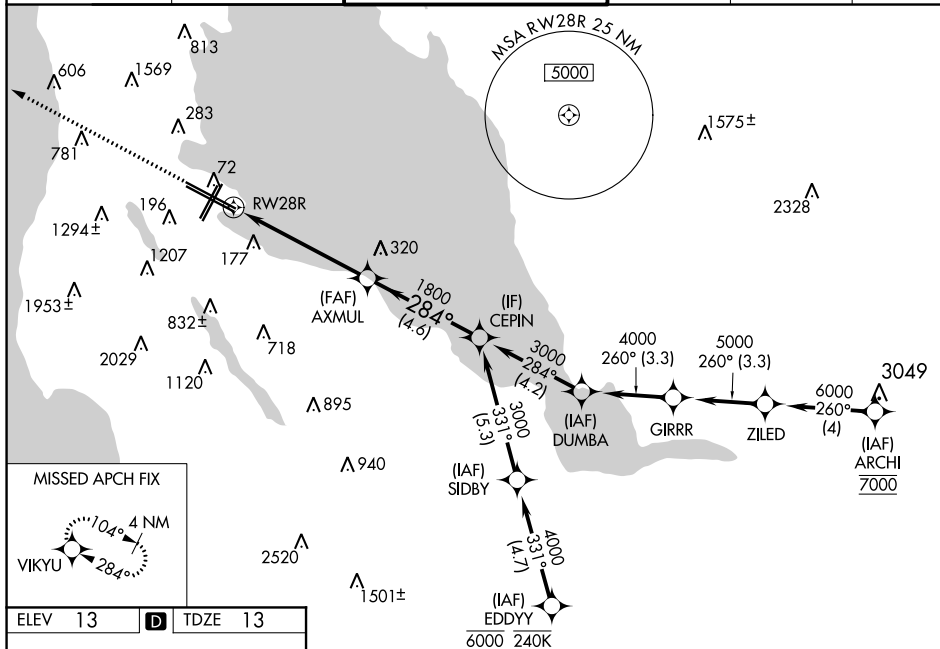


WAAS CH 48803 W28A	APP CRS 284°	Rwy Idg 11236 TDZE 13 Apt Elev 13
--	------------------------	--

RNAV (GPS) Z RWY 28R
SAN FRANCISCO INTL (SFO)

RNP APCH.			ALSF-2 	MISSED APPROACH: Climb to 3200 direct VIKYU and hold, continue climb-in-hold to 3200.		
T Circling NA to Rwy's 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D visibility to 2 SM.						
D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC	

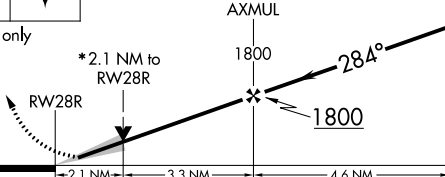

3200 ↑ * NNAV only		VIKYU  VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 68).		CEPIN	
					
CATEGORY	A	B	C	D	
LPV DA	213/18		200 (200-½)		
LNAV/VNAV DA	642-1⅓		629 (700-1⅓)		
LNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1¾	747 (800-1¾)	
C CIRCLING	760-1 747 (800-1)	960-1¼ 947 (1000-1¼)	1560-3 1547 (1600-3)	NA	