
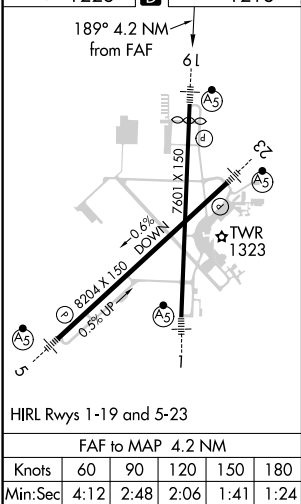


LOC I-RGO	APP CRS	Rwy Idg	7000
109.5	189°	TDZE	1218
		Apt Elev	1226

ILS or LOC RWY 19
AKRON-CANTON RGNL (CAK)

▽	** RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative ALS, increase CAT C/D visibility to RVR 6000. ZEVLO fix minimums: For inoperative ALS, increase CAT C/D visibility to RVR 5500.		MALSR	MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.		
						
ATIS 121.05	CLEVELAND APP CON * 125.5 269.25	AKRON-CANTON TOWER 134.75 279.575		GND CON 121.7 348.6	CLNC DEL 132.05	

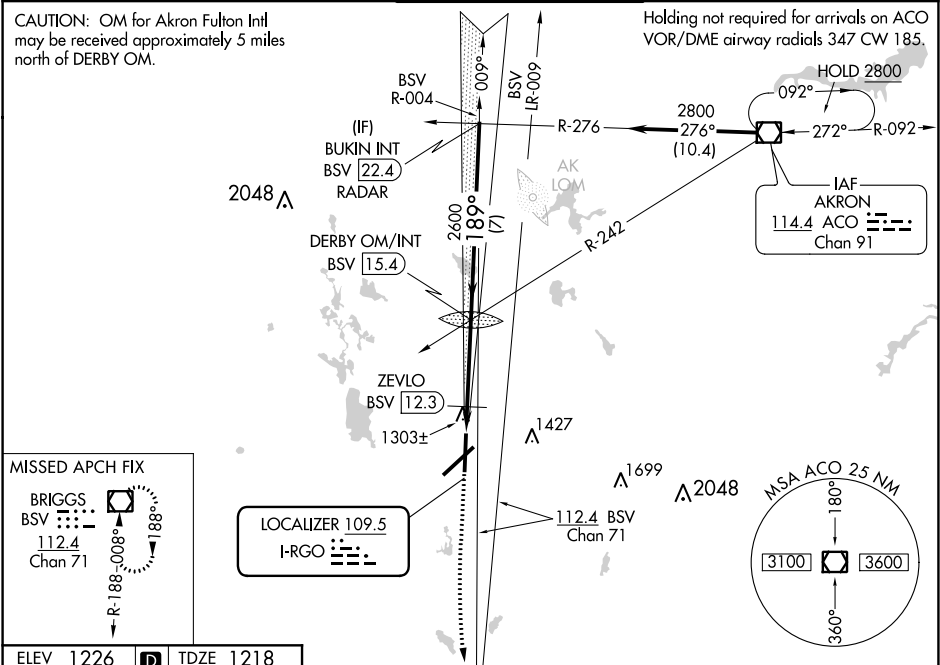

1700	3000	BSV	DERBY OM/INT BSV 15.4	BUKIN INT BSV 22.4 RADAR
*LOC only	ZEVLO BSV 12.3	2597	189°	2800
	BSV 11.1	*1620	*2600	2700
	1.1	3.1 NM	7 NM	
CATEGORY	A	B	C	D
S-ILS 19	**1418/24 200 (200-½)			
S-LOC 19	1620/24	402 (400-½)	1620/40	402 (400-¾)
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)
ZEVLO FIX MINIMUMS				
S-LOC 19	1580/24	362 (400-½)	1580/40 362 (400-¾)	
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)