


NDB FK <u>273</u>	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arpt Elev 571	AL-679 [USA]	CAMPBELL AAF (KHOP)		
RADAR required for procedure entry.			SSALR	MISSED APPROACH: Climb to 1200, then climbing right turn to 2500 direct to FK LOM and hold.		
* When ALS inop, increase CAT AB RVR to 50. ** Circling not authorized SE of Rwy 5-23.						
ATIS 125.175 308.4	APP CON 118.1 269.525	TOWER 120.9 278.8	GND CON 121.8 266.8	CLNC DEL 138.8	ASR/PAR	

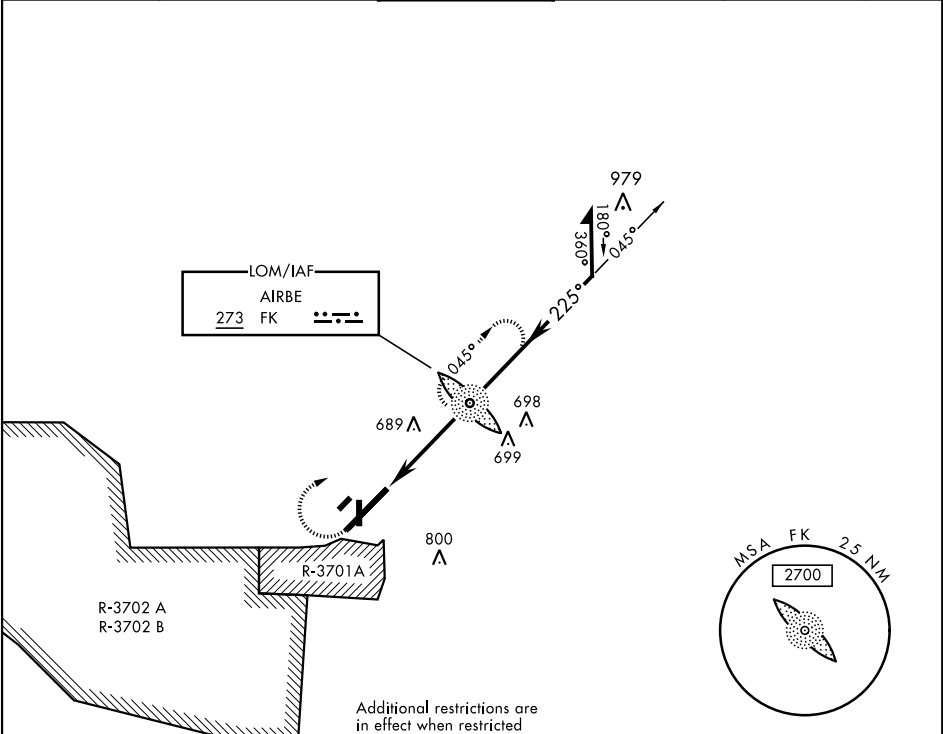

areas are active.

CATEGORY	A		B	C		D
S-23*	1120/40	549 (600-¾)		1120/60	549 (600-1)	
CIRCLING**	1120-1	549 (600-1)		1120-1 5/8 549 (600-1 1/8)	1140-2 569 (600-2)	

ELEV 571

TDZE 571

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28