

WAAS CH 58208 W01A	APP CRS 011°	Rwy Idg TDZE Apt Elev	9500 1017 1026
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 1R



KANSAS CITY INTL (MCI)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000 and LNAV Cat C/D/E visibility to RVR 5000. Simultaneous approach authorized with Rwy 1L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
4000 direct ANX
VORTAC and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

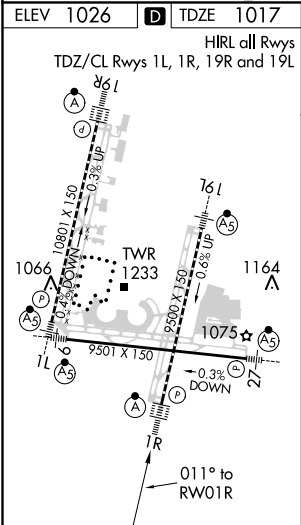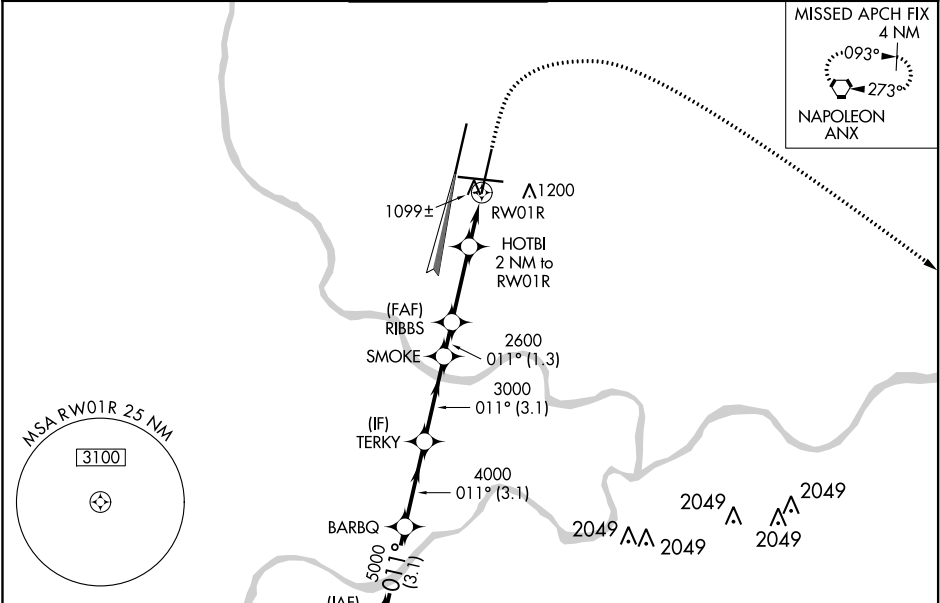

SPICY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).				
6000		BARBQ	TERKY	SMOKE	RIBBS	HOTBI
5000		4000	3000	2600	2600	2600
GP 3.00°		3.1 NM	3.1 NM	3.1 NM	1.3 NM	2.8 NM
TCH 59		1700		1.1 NM	0.9 NM	
		CATEGORY		A	B	C
		LPV DA		1217/18 200 (200-½)		
		LNAV/VNAV DA		1327/24 310 (400-½)		
		LNAV MDA		1360/24 343 (400-½)	1360/30 343 (400-⅝)	
		CIRCLING		1540-1 514 (600-1)	1540-1½ 514 (600-1½)	1580-2 554 (600-2)

NC-3, 21 APR 2022 to 19 MAY 2022

NC-3, 21 APR 2022 to 19 MAY 2022