

LOC/DME I-FNO 109.7 Chan 34	APP CRS 030°	Rwy Idg 5204 TDZE 700 Apt Elev 708
---	------------------------	---

ILS or LOC RWY 3
CLINTON MUNI (CWI)

⚠ When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase S-LOC 3 Cat C visibility 1/2 mile and increase OLABE fix minimums S-LOC 3 Cat C visibility 1/2 mile.

⚠ -35°C/-31°F


MALSR

MISSED APPROACH: Climb to 3100 then left turn direct HILLZ LOM/ I-FNO 6.3 DME/RADAR and hold.

AWOS-3PT 125.525	QUAD CITY APP CON * 125.95 257.8	CLNC DEL 118.5	UNICOM 122.8 (CTAF)
----------------------------	--	--------------------------	-------------------------------

ALTERNATE MISSED APCH FIX

DAVENPORT
CVA
113.8
Chan 85

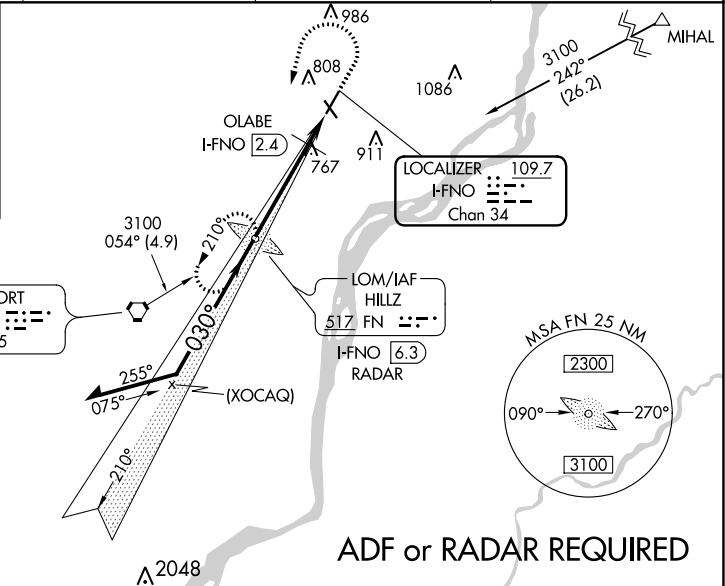

*1180 when using Davenport altimeter setting.

Remain within 10 NM

HILLZ LOM
I-FNO **6.3**
RADAR

3100

210°

030°

2600

GS 3.00°
TCH 56

2418

3100

OLABE
I-FNO **2.4**

***I-FNO 1.9**

I-FNO 1.1

***1120**

3.9 NM

0.5

0.8

FN

***LOC only.**

CATEGORY	A	B	C	D
S-ILS 3	900-1/2 200 (200-1/2)			NA
S-LOC 3	1120-1/2	420 (500-1/2)	1120-3/4 420 (500-3/4)	NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1 1/2 532 (600-1 1/2)	NA
OLABE FIX MINIMUMS				
S-LOC 3	1020-1/2 320 (400-1/2)			NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1 1/2 532 (600-1 1/2)	NA

ELEV 708 **D** **TDZE 700**

REIL Rwy 14 and 21 **⓪**

MIRL Rwy 14-32 **⓪**

HIRL Rwy 3-21 **⓪**

030° 5.2 NM from FAF

5204 FT

4201 FT

0.38 UP

0.38 UP

741

32

14

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

NC-3, 21 APR 2022 to 19 MAY 2022

NC-3, 21 APR 2022 to 19 MAY 2022