



VORTAC	EUF	Rwy Idg	5000
109.2	APP CRS	TDZE	285
Chan 29	187°	Apt Elev	285

VOR RWY 18
WEEDON FLD (EUF)

Use Clayton altimeter setting; when not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and Circling Cat C and D visibility ¼ SM; AFENY Fix Minimums: increase Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	11A AWOS-3 118.775	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------	----------------------------------	--------------------------	--------------------------

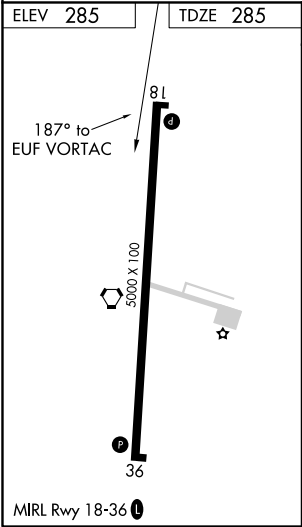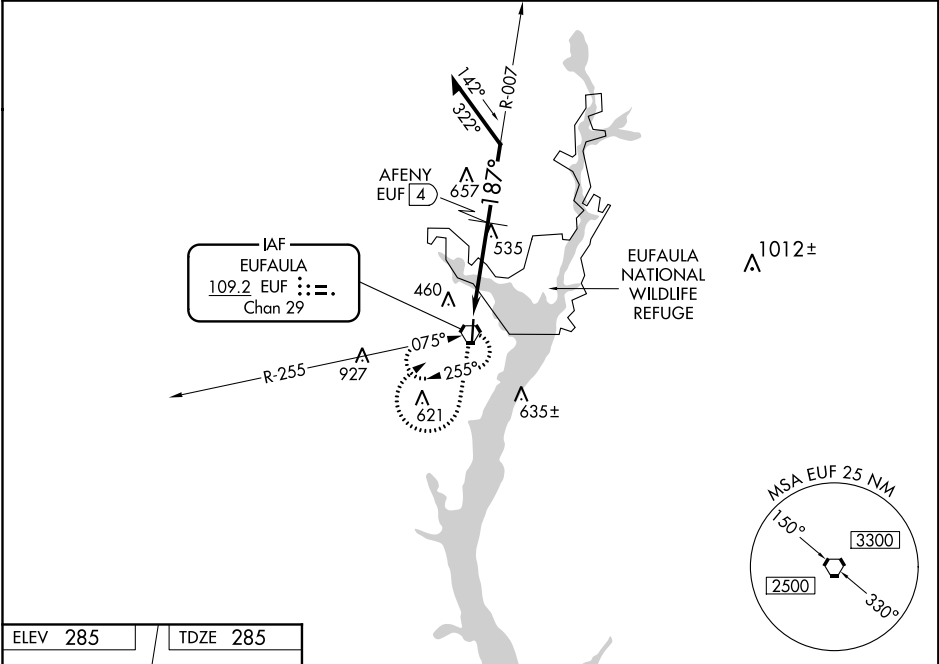

1500

↑

2000

↗

EUF

⬡

*1080 when using Columbus, GA altimeter setting.

EUF VORTAC

Remain within 10 NM

007°

2000

187°

1040*

4 NM

AFENY EUF 4

CATEGORY	A	B	C	D
S-18	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1040-2¼ 755 (800-2¼)	1040-2½ 755 (800-2½)
CIRCLING	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)
AFENY FIX MINIMUMS (DME REQUIRED)				
S-18	900-1 615 (700-1)		900-1¼ 615 (700-1¼)	900-2 615 (700-2)
CIRCLING	920-1 635 (700-1)		1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)