

WAAS CH 40199 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	7701 24 30
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 32



JACKSONVILLE INTL (JAX)


▼

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct OSBAJ and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
-------------------------	--	--	-------------------------------	----------------------------------	-------

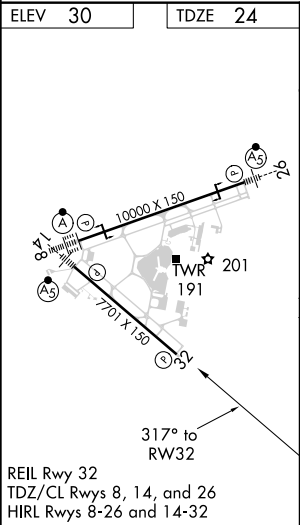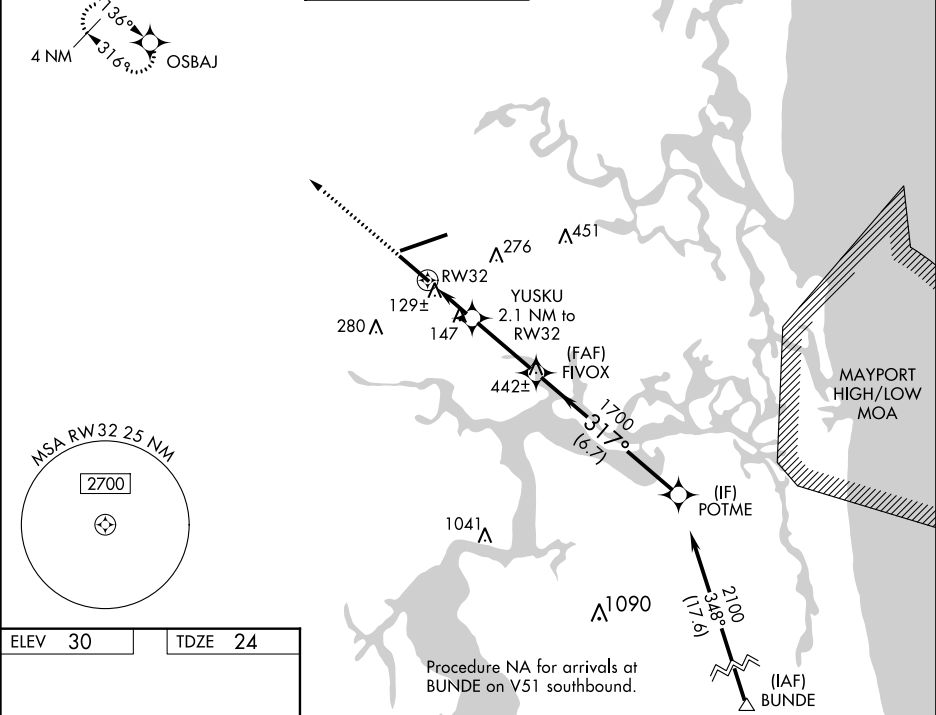

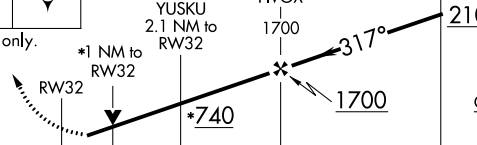2000	OSBAJ	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 67).			POTME
					
CATEGORY		A	B	C	D
LPV	DA	336-1 312 (400-1)			
LNAV/ VNAV	DA	387-1¼ 363 (400-1¼)			
LNAV	MDA	400-1 376 (400-1)			
CIRCLING		520-1 490 (500-1)	580-1½ 550 (600-1½)	640-2 610 (700-2)	