RNAV (GPS) RWY 6

ALBERTUS (FEP)

WAAS CH 56404 W06A	APP CRS 054°	Rwy Idg 5504 TDZE 859 Apt Elev 859

When local altimeter setting not received, use Chicago/Rockford altimeter setting: increase LPV DA to 1176 feet, LNAV/VNAV DA to 1438 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV visibility Cat C/D and Circling Cat C/D visibility ¼ SM. DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). Baro-VNAV and VDP NA when using Chicago/Rockford altimeter setting. Circling NA to Rwys 13, 18, 31, 36.

MISSED APPROACH: Climb to 2600 direct ADOSE and hold.

AWOS-3	ROCKFORD APP CON	CLNC DEL	UNICOM
120.525	126.0 327.0	121.85	122.8 (CTAF) L

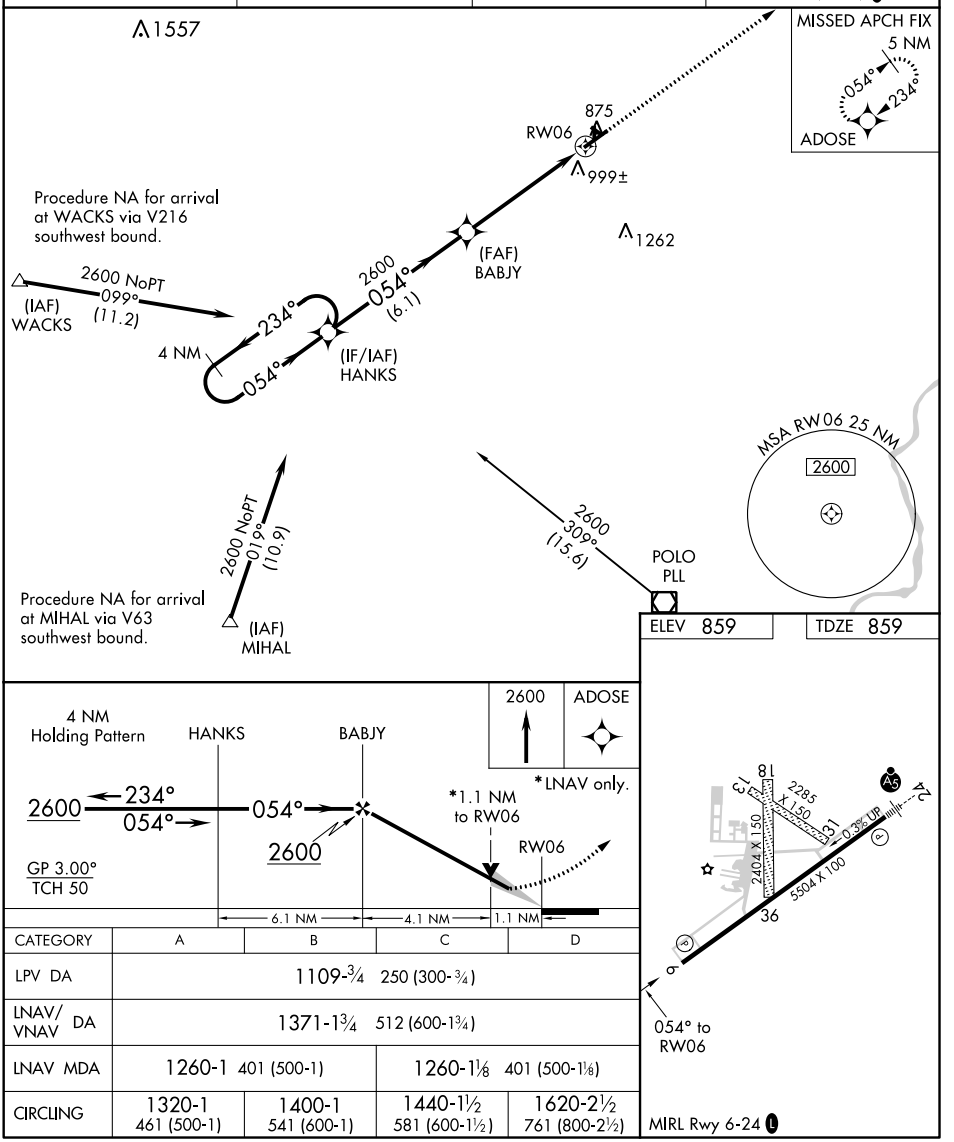

CATEGORY	A	B	C	D
LPV DA	1109-¾ 250 (300-¾)			
LNAV/VNAV DA	1371-1¾ 512 (600-1¾)			
LNAV MDA	1260-1 401 (500-1)		1260-1⅛ 401 (500-1⅛)	
CIRCLING	1320-1 461 (500-1)	1400-1 541 (600-1)	1440-1½ 581 (600-1½)	1620-2½ 761 (800-2½)

EC-3, 21 APR 2022 to 19 MAY 2022
EC-3, 21 APR 2022 to 19 MAY 2022