

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 4900 direct PAYIV and hold.

ASOS 119.275	CLEVELAND CENTER 124.325 353.85	UNICOM 123.0 (CTAF) 0
-----------------	------------------------------------	--------------------------

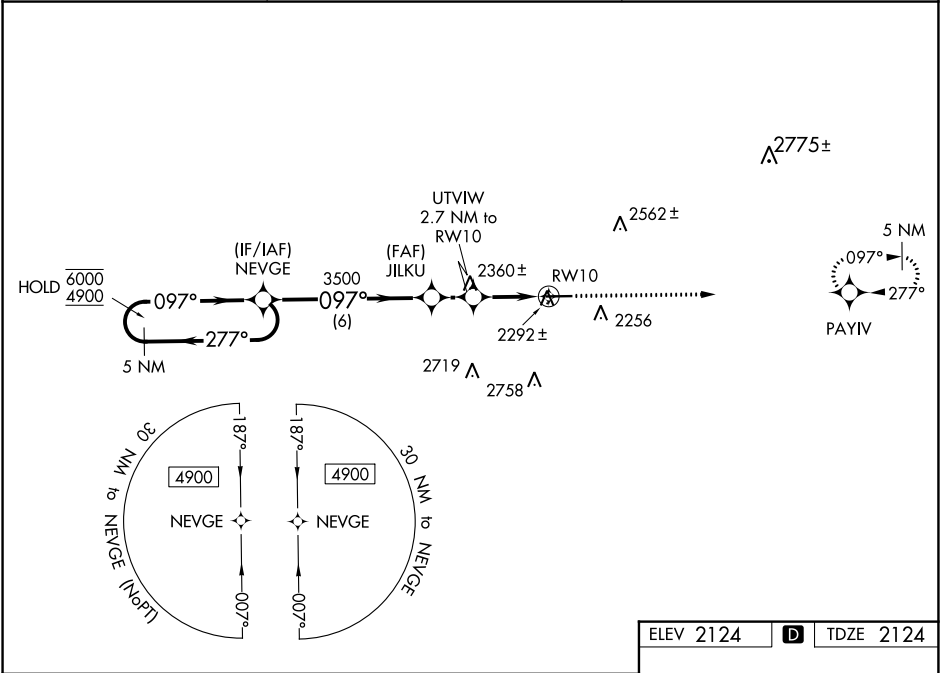

5 NM Holding Pattern

NEVGE

JILKU

UTVIW 2.7 NM to RW10

*1.2 NM to RW10

RW10

GP 3.00° TCH 39

6000 4900

277° 097° 097°

3500

*3020

4900 PAYIV

*LNAV only.

097° to RW10

2165

5301 X 100

0.4% UP

28

CATEGORY	A	B	C	D
LPV DA	2374-¾	250 (300-¾)		
LNAV/VNAV DA	2453-1	329 (400-1)		
LNAV MDA	2560-1	436 (500-1)	2560-1¼	436 (500-1¼)
CIRCLING	2640-1 516 (600-1)	2660-1 536 (600-1)	2880-2¼ 756 (800-2¼)	3060-3 936 (1000-3)

HIRL Rwy 10-28 0

REIL Rwy 10 0