

WAAS CH 65641 W22A	APP CRS 217°	Rwy Idg TDZE Apt Elev	5500 904 904
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22



BOLTON FLD (TZR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using John Glenn Columbus Intl altimeter setting. DME/DME RNP-0,3 NA. When local altimeter setting not received use John Glenn Columbus Intl setting and increase LPV DA to 1196 feet and LNAV/VNAV DA to 1382 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/8 SM, and LNAV Cat C/D visibility 1/4 SM.


MISSED APPROACH:
Climb to 2700 direct WATIG and hold.

AWOS-3 135.925	COLUMBUS APP CON 134.0 279.6	BOLTON TOWER ★ 128.1 (CTAF) 0	GND CON 121.8
--------------------------	--	---	-------------------------


RADAR REQUIRED

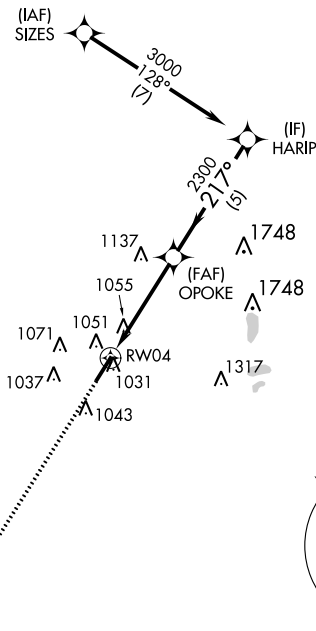

ELEV 904	TDZE 904
-----------------	-----------------

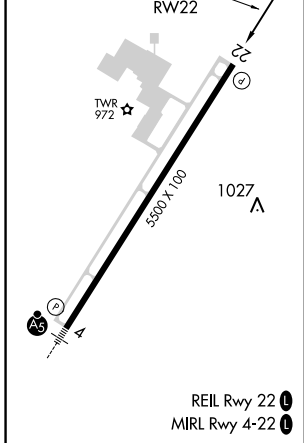

2700 WATIG VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

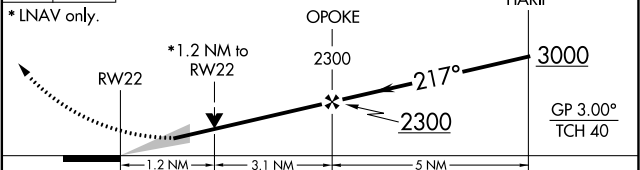

CATEGORY	A	B	C	D
LPV DA	1154-7/8 250 (300-7/8)			
LNAV/VNAV DA	1339-1 1/2 435 (500-1 1/2)			
LNAV MDA	1320-1	416 (500-1)	1320-1 1/8	416 (500-1 1/8)
C CIRCLING	1360-1 456 (500-1)	1380-1 476 (500-1)	1380-1 1/2 476 (500-1 1/2)	1500-2 596 (600-2)