

HOMESTEAD

MIAMI HOMESTEAD GENERAL AVIATION (X51) 4 NW UTC-5(-4DT) N25°29.95' W80°33.25'

MIAMI
L-23C, A
IAP


7 B NOTAM FILE MIA
RWY 18-36: H4001X100 (ASPH) S-40, D-65, 2D-110
 PCN 12 F/A/Y/T MIRL
RWY 18: Rgt tfc.
RWY 36: PAPI(P4R)—GA 3.0° TCH 24' .
RWY 10-28: H3000X75 (ASPH) S-20 PCN 5 F/A/Y/T MIRL
RWY 10: Tree.
RWY 28: Rgt tfc.
RWY 09U-27U: 2500X150 (TURF)
RWY 09U: Trees.

SERVICE: S4 FUEL 100LL, JET A OX 4
AIRPORT REMARKS: Attended 1200-0200Z†. PAJA SE corner of arpt. Glider act 8000' and blw and crop dusting invof arpt. Aerobatic box S of arpt and E of Rwy 01. Remote control model flying fields 1.8 NM N Rwy 19. Rwy 09U-27U mkd with white cones.

AIRPORT MANAGER: (305) 869-1702
WEATHER DATA SOURCES: AWOS-3 118.375 (305) 247-2791.
COMMUNICATIONS: CTAF/UNICOM 122.8

MIAMI APP/DEP CON 125.5
CLEARANCE DELIVERY PHONE: For CD ctc Miami Apch at 305-869-5432.
RADIO AIDS TO NAVIGATION: NOTAM FILE MIA.

DOLPHIN (H) (H) VORTAC 113.9 DHP Chan 86 N25°48.00' W80°20.94' 216° 21.2 NM to fld. 6/4W.
 TACAN AZIMUTH unusable:
 055°-065° byd 35 NM blo 3,000'
 185°-195° byd 23 NM
 226°-236° byd 35 NM
 DME unusable:
 055°-065° byd 35 NM blo 3,000'

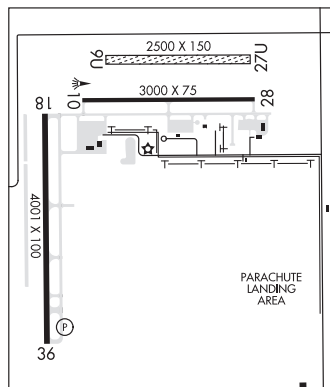

HOMESTEAD ARB (HST)(KHST) AFRC 3 E UTC-5(-4DT) N25°29.31' W80°23.01'

MIAMI
H-8I, L-23C, A
DIAP, AD

6 B TPA—See Remarks NOTAM FILE HST
RWY 06-24: H11202X300 (CONC-GRVD) PCN 90 R/A/W/T HIIRL
RWY 06: ALSF1. PAPI(P4L)—GA 2.5° TCH 54' . RVR-T Rgt tfc.
RWY 24: SALS. PAPI(P4L)—GA 2.5° TCH 43' . RVR-T

ARRESTING GEAR/SYSTEM

RWY 06 HOOK E5 (65 FT OVRN) BAK-14 BAK-12B(B) (1650 FT).

BAK-14 BAK-12B(B) (1087 FT) HOOK E5 (74 FT OVRN). **RWY 24**

SERVICE: **MILITARY—A—GEAR** Apch end BAK-12B(B)/14 for act rwy in lo position. Dep end BAK-12B(B)/14 for act rwy in raised posn. E-5 connected on dep end only. No-NOTAM MP N BAK-12/14 1200-1300Z† Thu, S BAK-12/14 1300-1400Z† Thu. **JASU** 3(AM32A-60) 2(A/M32A-86) **FUEL** A+, A++100. All acct rqr fuel, have in your possession the white DD Form 1896 fuel card, US Govt air card or your base billing info. **OIL** O-133-148 **TRAN ALERT** Opr 1130-0200Z†. No demineralized water avbl. No fleet svc avbl. **LGT** Rwy 06 apch lgts SFL OTS. Rwy 24 PAPI OTS ufn due to tree obst.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remarks. Opr 1200–0400Z†; 0400–1200Z† for base asgn alert acft only. **RSTD** PPR all tran acft. For PPR ctc Aflid Mgmt Ops DSN 535–7516, C786–4157516. PPR issued up to 7 days prior to arr, min 24 hr PN. PPR good for +/-1 hr. PPR time. No progressive taxiing allowed by tran acft. PPR good for +/- 1 hr PPR time. Coord of PPR outside of block time by telephone is rqr, or PPR number will be considered cnld exc for MEDEVAC and VIP acft. Tran acft call 50 NM out. Inbd DV acft ctc Comd Post 20 min prior to ldg with firm chock time. No lcl or round robin flts permitted by tran acft. Opr for base assign alert acft only 0400–1200Z†. Tran maint must be present for acft parking, engine start and for launch of all tran acft. Alert fac twy rstd to acft with wing span of 60' or less. **CAUTION** Heliport 2.2 NM SW, exer extreme caution. Stadium lgt 3 NM from AER 06 haz to ngt vision. Bird haz, especially prevalent 1 hr before SS and 1 hr after SR. Aflid experiences tmpry Bird Watch Cond Severe. Ctc Aflid Mgmt OPS for bird haz info. Bird Watch Cond is on ATIS. Extv high performance mil jet opr on and invof arpt. **TFC PAT** TPA—Overhead TPA 2000' AGL. Dur VFR cond, tkf, low apch, touch and go, acft maintain 1000' until departure EOR to avoid overhead pat. **MISC** Cargo, pax, and transportation support only avbl Mon–Fri 1230–2100Z†. All logistics support esp outside these times must be coord and apvd by 482 LRS plans prior to PPR rqst at DSN 535–7033/7034/8156. C786–415–7033/7034/8156, C786–427–3778. No eng running on/off–load wo prior coord w/LRS. Winds are estimated due to FMQ 13 wind sensors being accurate to within only +/- 4 kt. ATC/Wx will not include/relay wind correction into fcst/phraseology. Therefore, aircrews will incorporate a +/- 4 kt accuracy into their decision making process for flying opr. Acft arr from NE sector can exp numerous frequency changes dur enroute descent. For departure ctc twr direct. Tran acft ldg with hot armament, advise twr on initial ctc. NSTD mark on tran acft ramp. Aflid wx mnt by AN/FMQ–19 automated obs sys and augmented by human observer as rqr. Full wx svc avbl H24 DSN 535–7511, C786–415–7511. Classified storage avbl at Comd Post.

AIRPORT MANAGER: 786-415-7529

COMMUNICATIONS: ATIS 132.275 269.9 (1200–0400Z†) PTD 372.2

® **APP/DEP CON** 123.8 257.675 269.575 370.925 (1200–0400Z†)

® **MIAMI APP/DEP CON** 125.5 318.2 354.1 (0400–1200Z†)

TOWER 133.45 279.55 318.2 **GND CON** 121.75 275.8 **CLNC DEL** 121.75 275.8

COMD POST (REEF CONTROL) 381.3 (DSN 535–7068, C786–415–7068) **PMSV METRO** 318.65

93FS (MAKO OPS) 138.025 303.15

AIRSPACE: CLASS D svc 24 hrs.

RADIO AIDS TO NAVIGATION: NOTAM FILE HST.

(T) **TACAN** Chan 19 HST (108.2) N25°29.40' W80°22.76' at fld. 3/6W.

No NOTAM MP: 1100–1300Z† Wed (1500/3+1)

ILS 109.9 I–HST Rwy 06. Class IT. No NOTAM MP: 1100–1300Z† Tue and Thu (1,500/3+1).

ASR (1200–0400Z†)